THE LATEST REVISIONS OF THE STANDARD SHEETS MAINTAINED BY THE

CONSIDERED TO BE IN EFFECT. ALL PAY ITEMS AND WORK CONTAINED IN

ALL WORK CONTEMPLATED UNDER THIS CONTRACT IS TO BE COVERED

EXCEPT AS MODIFIED BY THESE PLANS OR BY CHANGES SET FORTH IN

CONTRACT PLANS HAVE BEEN DESIGNED IN ACCORDANCE WITH NYSDOT

POLICIES AND GUIDE LINES AND THE FINAL DESIGN REPORT APPROVED

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE

ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, ARCHITECT, LANDSCAPE ARCHITECT, OR LAND

SURVEYOR, TO ALTER AN ITEM IN ANY WAY. IF AN ITEM BEARING

THE STAMP OF A LICENSED PROFESSIONAL IS ALTERED, THE

THE CITY OF PLATTSBURGH WILL BE RESPONSIBLE FOR MAINTENANCE OF THE ROADWAY, SIDEWALKS. AND TRAFFIC

SIGNALS CONSTRUCTED UNDER THIS CONTRACT.

ALTERING ENGINEER, ARCHITECT, LANDSCAPE ARCHITECT, OR

LAND SURVEYOR SHALL STAMP THE DOCUMENT AND INCLUDE THE

DATE OF SUCH ALTERATION, AND A SPECIFIC DESCRIPTION OF THE

NOTATION "ALTERED BY" FOLLOWED BY THEIR SIGNATURE, THE

608-01, 609-03, 619-02, 619-04, 619-10, 619-11, 619-12, 619-51, 619-61,

645-01, 645-03, 645-14, 680-01, 680-02, 680-04, 680-05, 680-06, 680-10,

BY AND IN CONFORMITY WITH THE STANDARD SPECIFICATIONS (US CUSTOMARY) REFERENCED IN THE CONTRACT PROJECT "PROPOSAL"

NEW YORK STATE DEPARTMENT OF TRANSPORTATION, WHICH ARE

CURRENT ON THE DATE OF ADVERTISEMENT FOR BIDS, SHALL BE

THE CONTRACT AND ANY ADDITIONAL PAY ITEMS AND WORK ENCOUNTERED DURING THE COURSE OF THE CONTRACT SHALL BE SUBJECT TO THE APPLICABLE STANDARD SHEET(S) UNLESS OTHERWISE

SPECIFIED IN THE CONTRACT DOCUMENTS.

THE CONTRACT PROJECT "PROPOSAL."

ALTERATION.

680-13, 685-01

MAINTENANCE RESPONSIBILITY

NYSDOT STANDARD SHEETS


SITE OF WORK



CITY OF PLATTSBURGH **DEPARTMENT OF PUBLIC WORKS CLINTON COUNTY, NEW YORK**

LOCAL PEDESTRIAN SAFETY **ACTION PLAN**

OCTOBER 2021

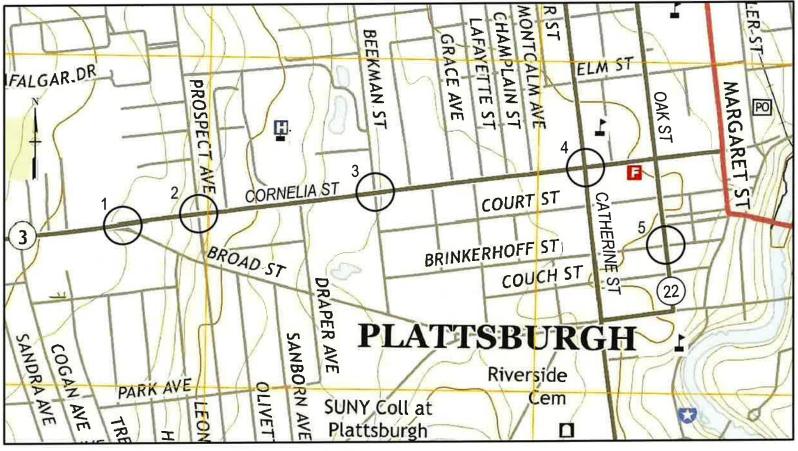

PROJECT LOCATION MAP

APPROVED BY: CITY OF PLATTSBURGH

	1.
0	11-4-2021
CHRISTOPHER ROSENQUEST	DATE
MAYOR	

PROJECT LOCATION

THE PROJECT IS LOCATED AT THE FOLLOWING FIVE INTERSECTIONS IN THE CITY OF PLATTSBURGH:

- 1. CORNELIA STREET (NYS ROUTE 3) AT BROAD STREET
- 2. CORNELIA STREET (NYS ROUTE 3) AT PROSPECT AVENUE
- 3. CORNELIA STREET (NYS ROUTE 3) AT BEEKMAN STREET
- 4. CORNELIA STREET (NYS ROUTE 3) AT NORTH CATHERINE STREET
- 5. OAK STREET (NYS ROUTE 22) AT BRINKERHOFF STREET

CONTRACTOR'S NAME	//			
AWARD DATE				
COMPLETION DATE				
FINAL ACCEPTANCE DATE				
CITY ENGINEER				
RESIDENT ENGINEER				
FINAL COST TOTAL				
FISCAL SHARE	COST(S)			
1				
2	2			
3	()			



CITY OF PLATTSBURGH COUNTY: CLINTON SHEET NO. FED. ROAD REG. NO. STATE CAPITAL PROJECT 70PS.03 IDENTIFICATION NO.

INDEX ON SHEET NO.

LOCAL PEDESTRIAN SAFETY ACTION PLAN FIVE SIGNALIZED INTERSECTIONS

FEATURE	SYMBOL				
ALIGNI	MENT				
CONTROL (CENTERLINE)	-				
CENTER OF CURVATURE	*				
POINT OF CURVATURE	©				
POINT OF INTERSECTION	Δ				
POINT OF BEGINNING	۵				
POINT OF CURVATURE	\odot				
POINT OF END	۵				
POINT ON TANGENT	\odot				
POINT OF VERTICAL CURVATURE	(#)				
VERTICAL EVENT POINT	۵				
VERTICAL HIGH POINT	\odot				
VERTICAL LOW POINT	\odot				
CONT	TROL .				
BASELINE					
BASELINE, PROJECTION					
BASELINE, POINT	Δ				
BASELINE, POINT ON LINE	\odot				
BASELINE, SPUR POINT	©				
BASELINE, TIE POINT	⅍				
BENCHMARK	•				
POINT, SURVEY MARKER, PERM.	∅				
DRAIN	NAGE				
CATCH BASIN					
FIRE HYDRANT					
CATCH BASIN ROUND					
STORM LINE					
LANDS	CAPE				
BOULDER					
DECIDUOUS TREE					
DECIDUOUS SHRUB					
BUILDING					
HEDGE ROW					
PLANTER BED					
PROPERTY LINE	НВ				
WOOD LINE					
CHAINLINK FENCE					
STOCKAID FENCE					
RAILING					
ROW MAPPING					
HIGHWAY BOUNDARY	НВ				
HIGHWAY BNDRY., APPROX.	×				
HIGHWAY BNDRY, PT.	×				
PT., FENCE LOCATION	*				
PT., IRON PIPE	0				
PT., IRON ROD	\odot				
PT., MONUMENT					
PT., NAIL	×				
PT., RAILROAD SPIKE	*				
PT., SPIKE	斑				
•	•				

FEATURE	SYMBOL				
ROW MAPPING					
PT., STAKE	*				
PT., TREE W/ WIRE	⊗				
PT., WALL LOCATION	+				
SIGN	S				
SIGN					
MULTI POST SIGN					
POST					
TRAFFIC CO	NTROL				
ADA CROSSING PAD					
PULL BOX					
CONTROLLER	C				
PUSH BUTTON	A				
SIGN	•-				
POLE					
PEDESTRIAN HEAD					
CONDUIT					
UTILITIE	S				
SANITARY SEWER MANHOLE					
UNKNOWN MANHOLE					
COMMUNICATION MANHOLE					
WATER VALVE					
GAS FILLCAP					
UNKNOWN VALVE					
MONITORING WELL					
ELECTRIC BOX					
ELECTRIC METER					
UTILITY POLE W/ LIGHT					
UTILITY POLE					
UTILITY POLE DEAD					
GUY WIRE					
PEDESTRIAN LIGHT POLE					
UTILITY LIGHT POLE					
UTILITY MARKOUT					
STORM MANHOLE					
OVERHEAD UTILITY LINE					
UNIDENTIFIED UTILITY LINE	UIND				
SANITARY LINE					
WATER LINE					
GAS LINE					
FIBER OPTIC LINE					
ROADV	/AY				

	ALIGNMENT
	, <u> </u>
ABBR.	DESCRIPTION
AZ	AZIMUTH
<u> </u>	BASELINE
Œ	CENTERLINE
R	RADIUS
	UTILITIES
ABBR.	DESCRIPTION
Е	ELECTRIC
EMH	ELECTRIC MANHOLE
F0	FIBER OPTIC
G	GAS
GP	GUY POLE
GV	GAS VALVE (MAIN LINE)
HYD	HYDRANT
LP	LIGHT POLE
SA	SANITARY SEWER
SMH	SANITARY MANHOLE
ST	STORM SEWER
Т	TELEPHONE
W	WATER
WV	WATER VALVE (MAIN LINE)
TO	POGRAPHY (MISCELLANEOUS)
ABBR.	DESCRIPTION
AOBE	AS ORDERED BY ENGINEER
ASPH	ASPHALT
BLDG	BUILDING
ВМ	BENCH MARK
CONC	CONCRETE
EIC	ENGINEER IN CHARGE
EP	EDGE OF PAVEMENT
PED POLE	PEDESTRIAN POLE
ROW	RIGHT OF WAY
ST	STREET
SW	SIDEWALK
TYP	TYPICAL
	TOPOGRAPHY (DRAINAGE)
ABBR.	DESCRIPTION
BC	BOTTOM OF CURB
СВ	CATCH BASIN
DIA	DIAMETER
ELEV	ELEVATION
МН	MANHOLE
TC	TOP OF CURB

STANDARD SYMBOL (PLANS)	ITEM PAYMENT UNIT: ESTIMATE OF QUANTITIES SHEET	EQUIVALENT NOMENCLATURE: (SPECS/PROPOSAL)
•	ft	LINEAR FEET
ftq	SF	SQUARE FEET
YDr	CY	CUBIC YARD
mi	MI	MILES
AC	AC	ACRES
lb	LB	POUND
TON	TON	TON
GAL	GAL	GALLON

INDEX					
SHEET NO.	DRAWING NO.	TITLE			
1	-	TITLE SHEET			
2	ILA-1	INDEX, LEGEND, AND ABBREVIATIONS			
3	GN-1	GENERAL NOTES			
4	EQ-1	ESTIMATE OF QUANTITIES			
5	BLT-1	BASELINE TIES & BENCHMARKS			
6 TO 8	WZTC-1 TO WZTC-3	WORK ZONE TRAFFIC CONTROL			
9	MD-1	MISCELLANEOUS DETAILS			
10 TO 14	TSP-1 TO TSP-5	TRAFFIC SIGNAL PLANS			
15	TSN-1	TRAFFIC SIGNAL NOTES AND QUANTITIES			
16	TSN-2	TRAFFIC SIGNAL DETAILS			
17	TSN-3	TRAFFIC SIGNAL QUANTITIES			
18 TO 20	CRD-1 TO CRD-3	CURB RAMP DETAILS			





LOCAL PEDESTRIAN SAFETY ACTION PLAN

CITY OF PLATTSBURGH CLINTON COUNTY, NEW YORK

MARK DATE DESCRIPTION

PROJECT NO: A54.001.001 DRAWN BY: MNG DESIGNED BY: KAN CHECKED BY: TEH

NO ALTERATION PERMITTED HEREON EXCEPT AS PROVIDED UNDER SECTION 7209 SUBDIVISION 2 OF THE NEW YORK EDUCATION LAW

INDEX, LEGEND & ABBREVIATIONS

ILA-1

SHEET 2 OF 20

- 3. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS PRIOR TO THE START OF WORK AND/OR PREPARATION OF SHOP DRAWINGS. THE CONTRACTOR SHALL REPORT ANY DISCREPANCIES TO THE ENGINEER IMMEDIATELY AND PRIOR TO THE START OF CONSTRUCTION ACTIVITIES.
- 4. WHENEVER ITEMS IN THE CONTRACT REQUIRE MATERIALS TO BE REMOVED AND DISPOSED OF, THE COST OF SUPPLYING A DISPOSAL AREA AND TRANSPORTATION TO THAT AREA SHALL BE INCLUDED IN THE UNIT PRICES BID FOR THOSE ITEMS.
- THE COST OF ALL JOINT MATERIAL SHALL BE INCLUDED IN THE UNIT PRICES BID FOR THE VARIOUS ITEMS OF THE CONTRACT, UNLESS OTHERWISE SPECIFIED ON THE PLANS.
- ALL DISTURBED AREAS SHALL BE RESTORED BY THE TREATMENT SHOWN ON THE PLANS, BY TOPSOIL AND SEEDING, OR AS ORDERED BY ENGINEER. GRADING SHALL BE SHAPED TO ALLOW SURFACE DRAINAGE TO RETURN TO ITS ORIGINAL CONDITION.
- 7. TYPICAL WORK LIMITS ARE SHOWN ON THE PLANS. ACTUAL LIMITS OF WORK SHALL BE DETERMINED IN THE FIELD AT THE TIME OF CONSTRUCTION. THE ENGINEER SHALL DEFINE SPECIFIC LIMITS WHERE QUESTIONS ARISE
- 8. THE ROADWAY SHALL BE KEPT CLEAN OF MUD AND DEBRIS AT ALL TIMES.
- . MATERIALS, EQUIPMENT AND VEHICLES SHALL NOT BE STORED OR PARKED WITHIN THE HIGHWAY RIGHT-OF-WAY BEFORE WORK BEGINS OR AFTER CONTRACTOR'S OPERATIONS ARE SHUT DOWN. STAGING AREAS OUTSIDE THE RIGHT-OF-WAY SHALL BE USED TO STOCKPILE ALL CONSTRUCTION MATERIALS, DURING WORKING HOURS, NO CONSTRUCTION MATERIAL MAY BE STORED OR PLACED ON THE ROADWAY OR ROADBED EXCEPT WITHIN A PROTECTED WORK AREA.

DEFINITIONS

- THE WORDS "SHALL", "SHOULD", AND "MAY", AS USED IN THE CONTRACT DOCUMENTS, HAVE THE FOLLOWING MEANINGS:
 - SHALL A MANDATORY CONDITION. IN THE DESIGN, APPLICATION, OR LOCATION OF DEVICES REQUIREMENTS HAVING "SHALL" STIPULATIONS ARE MANDATORY. NO DISCRETION IN FOLLOWING THEM IS ALLOWED.
 - SHOULD AN ADVISORY CONDITION. WHERE "SHOULD" IS USED IN RELATION TO A PROVISION, THAT PROVISION IS RECOMMENDED, AND NORMALLY IS TO BE FOLLOWED, BUT IS NOT MANDATORY, DEVIATION FROM SUCH PROVISIONS IS PERMISSIBLE IF, AND TO THE EXTENT. THERE IS JUSTIFIABLE CAUSE TO DO SO.
- MAY A PERMISSIVE CONDITION. NO REQUIREMENT FOR DESIGN OR APPLICATION IS INTENDED.

HIGHWAY WORK PERMITS

 THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL REQUIRED STATE, COUNTY, AND MUNICIPAL PERMITS WITHIN HIGHWAY RIGHTS—OF—WAY.

HOURS OF OPERATION

 WORK HOURS SHALL BE LIMITED TO BETWEEN 7 AM AND 7 PM. NO NIGHT WORK IS ALLOWED UNDER THIS CONTRACT. CONTRACTOR SHALL ABIDE BY ALL LOCAL NOISE ORDINANCES.

SUBMISSION GUIDELINES

- ALL SHOP DRAWINGS, DETAILS AND COMPUTATION SHEETS SUBMITTED FOR THIS CONTRACT SHALL BE IN U.S CUSTOMARY UNITS.
- THE CONTRACTOR SHALL SUBMIT ALL SHOP DRAWINGS, DETAILS AND COMPUTATION SHEETS TO THE ENGINEER FOR APPROVAL. THE ENGINEER SHALL BE PERMITTED THE LONGEST OF THE FOLLOWING TIME LIMITS TO RENDER A DECISION ON THE CONTRACTOR' SUBMISSION:
- A. TEN (10) WORKING DAYS
- B. TWO (2) WORKING DAYS FOR EACH DRAWING OF A SET OF DRAWINGS OR
- C. ONE (1) WORKING DAY FOR EVERY FOUR (4) COMPUTATION SHEETS. ANY SHEET WRITTEN ON BOTH SIDES WILL BE CONSIDERED TWO (2) COMPUTATION SHEETS.
- ALL THE TIME LIMITS WILL BE MEASURED BASED UPON THE RECEIPT OF ALL REQUIRED INFORMATION BY THE ENGINEER.
- 4. UPON APPROVAL, ONE (1) SET OF DRAWINGS AND COMPUTATIONS SHALL BE FURNISHED BY THE CONTRACTOR TO THE ENGINEER FOR THEIR RECORDS.

STAGING AREAS

2021 t\A54

I. THERE ARE NO AREAS WITHIN THE CONTRACT LIMITS AVAILABLE FOR STAGING EQUIPMENT OR OPERATIONS.

SURVEY CONTROL

- CONTRACTOR IS RESPONSIBLE FOR ALL SURVEY NEEDED TO COMPLETE THE WORK. PAYMENT FOR SURVEY WORK WILL BE MADE UNDER ITEM 625.01—SURVEY OPERATIONS.
- ALL RIGHT-OF-WAY MONUMENTS AND PROPERTY CORNERS ARE TO BE PROTECTED, SAFEGUARDED AND PRESERVED. ANY RIGHT-OF-WAY OR PROPERTY CORNERS THAT ARE DISTURBED BY CONTRACTOR'S OPERATIONS SHALL BE REPLACED BY A NYS LICENSED SURVEYOR AT THE CONTRACTOR'S FXPENSE.

EXISTING DRAINAGE FACILITIES

- THE CONTRACTOR SHALL BECOME ACQUAINTED WITH THE DRAINAGE CHARACTERISTICS OF THE AREA IN ORDER TO PROGRESS WORK EFFICIENTLY WITH FULL KNOWLEDGE OF THE POTENTIAL DRAINAGE PROBLEMS.
- 2. THE CONTRACTOR SHALL ENSURE ALL EXISTING DRAINAGE SYSTEMS, INCLUDING CATCH BASINS AND CULVERTS, ARE KEPT CLEAN AND FREE FLOWING FOR THE DURATION OF THE CONTRACT, AT NO COST TO THE CITY (UNLESS OTHERWISE SPECIFIED).

UTILITIES

- 1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING AND MAINTAINING SERVICE OF ALL UTILITIES ENCOUNTERED IN THE WORK AREA. THE CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR ALL DISRUPTIONS TO UTILITY SERVICE CAUSED BY THE CONTRACTOR'S OPERATIONS. DAMAGE TO EXISTING UTILITIES AND APPURTENANCES RESULTING FROM THE CONTRACTOR'S OPERATIONS SHALL BE RESTORED, AT THE CONTRACTOR'S SOLE EXPENSE, TO THE OWNER'S SATISFACTION OR AS ORDERED BY THE ENGINEER.
- 2. IN THE EVENT THE CONTRACTOR DAMAGES AN EXISTING UTILITY SERVICE, CAUSING AN INTERRUPTION IN SAID SERVICE, THE CONTRACTOR SHALL IMMEDIATELY BEGIN WORK TO RESTORE SERVICE AND SHALL NOT CEASE SUCH WORK UNTIL SERVICE IS RESTORED.
- 3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING ALL UTILITIES, INCLUDING STREET LIGHTING CONDUITS, TRAFFIC SIGNAL CONDUITS ETC. PRIOR TO DRIVING SIGN POSTS OR EXCAVATING WITHIN THE LIMITS OF THE CONTRACT. THE COST OF REPAIRING DAMAGE TO CONDUITS, CONDUCTORS AND APPURTENANCES SHALL BE PAID FOR BY THE CONTRACTOR.
- 4. THE APPROXIMATE LOCATION OF THE UNDERGROUND UTILITIES ARE SHOWN ON THE PLANS. THE CONTRACTOR SHALL VERIFY THE TRUE LOCATION BEFORE COMMENCING WORK. THE UTILITY LOCATION QUALITY LEVEL DEFINITION SHOWN ON THESE PLANS DEFINED AS FOLLOWS:

QUALITY LEVEL C - RECORD INFORMATION PROVIDED BY UTILITY OWNERS WAS PLOTTED ON THE CONTRACT PLANS. DEPTHS WERE NOT FIELD VERIFIED. PHYSICAL SURFACE FEATURES LIKE MANHOLES, VALVE BOXES AND HYDRANTS HAVE BEEN FIELD LOCATED.

<u>SIGNS</u>

- 1. ALL SIGNS SHALL BE MAINTAINED BY THE CONTRACTOR AND AS DIRECTED BY THE ENGINEER.
- IF EXISTING SIGNS ARE DAMAGED AS A RESULT OF THE CONTRACTOR'S OPERATIONS, THE CONTRACTOR SHALL SUPPLY A NEW SIGN, MEETING THE SAME STANDARD, AT NO COST TO THE OWNER

RIGHT OF WAY

- 1. ALL WORK TO BE PERFORMED UNDER THIS CONTRACT WILL BE WITHIN THE PUBLIC RIGHT-OF-WAY (ROW) IN ACCORDANCE WITH SECTION 105-15 OF THE STANDARD SPECIFICATIONS. THE CONTRACTOR IS TO ASSURE HIMSELF THAT ALL WORK IS BEING PERFORMED WITHIN THE ROW, INCLUDING BUT NOT LIMITED TO VEHICLE ACCESS; STORAGE OF EQUIPMENT, MATERIALS, DEBRIS AND WASTE; LANDSCAPING; VEGETATION REMOVAL AND MANAGEMENT; GRADING, SEEDING AND THE INSTALLATION OF TURF; AND THE INSTALLATION OF ANY FENCES OR PROTECTIVE BARRIER.
- 2. IF CONTRACTOR IS UNABLE TO IDENTIFY THE LIMITS OF THE RIGHTS-OF-WAY WHEN THE CONTRACT CALLS FOR WORK IN THOSE VICINITIES, THE CONTRACTOR MUST CONTACT THE ENGINEER IN CHARGE FOR DEFINITIVE BOUNDARY DETERMINATIONS BEFORE ANY WORK MAY BE INITIATED AT THOSE LOCATIONS (STANDARD SPECIFICATIONS SECTIONS 105-10 AND 625).
- 3. IN ACCORDANCE WITH SECTION 105-15 OF THE STANDARD SPECIFICATIONS, RELEASES FOR ANY NON-ESSENTIAL CONTRACT WORK OUTSIDE OF THE EXISTING RIGHTS-OF-WAY, INCLUDING PLANTINGS, LANDSCAPING OR DRIVEWAY ENHANCEMENT, WILL BE PROVIDED BY THE PROJECT ENGINEER AND IN NO INSTANCE ARE TO BE SECURED BY THE CONTRACTOR. THE CONTRACTOR SHALL NOT INVADE UPON PRIVATE PROPERTIES, LANDS OR BUILDINGS OUTSIDE OF THE RIGHTS-OF-WAY FOR ANY REASON WITHOUT FIRST SECURING WRITTEN PERMISSION FROM THE PROPERTY OWNER (STANDARD SPECIFICATIONS SECTION 105-15).
- 4. THE CONTRACTOR WILL BE HELD LIABLE FOR ANY DAMAGES DONE. ANY SUCH INJURIES OR DAMAGES SHALL BE SATISFACTORILY REPAIRED OR ITEMS REPLACED AT THE CONTRACTOR'S EXPENSE (STANDARD SPECIFICATIONS SECTION 107-08).

DISPOSAL OF CONSTRUCTION AND DEMOLITION DEBRIS

 THERE ARE NO AREAS WITHIN THE CONTRACT LIMITS AVAILABLE FOR DISPOSAL OF DEBRIS.

HAZARDOUS WASTE AND CONTAMINATED MATERIALS

 THE CONTRACTOR SHOULD BE AWARE THAT THE PROJECT SITES HAVE BEEN SCREENED AND NYSDEC RECORDS INDICATE A FUEL SPILL AT THE NORTHEAST CORNER OF CORNELIA AND BROAD STREETS (STEWART'S SHOPS). THE INCIDENT IS CLOSED AND NO CONTAMINATED SOIL IS EXPECTED TO BE ENCOUNTERED. IF THE CONTRACTOR ENCOUNTERS ANY SUSPECT SOIL, NOTIFY THE ENGINEER IN CHARGE IMMEDIATELY.

TEMPORARY SOIL EROSION AND SEDIMENT CONTROL NOTES

- THROUGHOUT THE DURATION OF THE CONTRACT, CONTRACTOR SHALL PROTECT ALL WATER COURSES FROM WATER BORNE SEDIMENT OR POLLUTANTS ORIGINATING FROM ANY WORK DONE IN SUPPORT OF THIS PROJECT.
- 2. IN ACCORDANCE WITH SECTIONS 107-12 AND 209-3.01 OF THE NYSDOT STANDARD SPECIFICATIONS, THE CONTRACTOR SHALL DESIGNATE AN EROSION AND SEDIMENT CONTROL SUPERVISOR FOR THE PROJECT. THE SUPERVISOR SHALL BE RESPONSIBLE FOR IMPLEMENTING THE EROSION AND SEDIMENT CONTROL MEASURES AND FOR INSPECTING AND MAINTAINING THE CONTROL MEASURES. THE NAME AND QUALIFICATIONS (TRAINING AND EXPERIENCE) OF THIS INDIVIDUAL SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO STARTING EARTHWORK.
- 3. EROSION AND SEDIMENT CONTROL MEASURES SHALL BE INSTALLED PRIOR TO ANY SOIL DISTURBANCE FOR WHICH THEY ARE INTENDED AND SHALL REMAIN IN PLACE UNTIL SOILS ARE PERMANENTLY STABILIZED.
- 4. NO WET OR FRESH CONCRETE, LEACHATE, MATERIAL, OR DEBRIS SHALL BE ALLOWED TO ESCAPE INTO A WATER BODY OR WETLAND, NOR SHALL WASHINGS FROM CONCRETE TRUCKS, MIXERS OR OTHER DEVICES BE ALLOWED TO ENTER WATER BODY OR WETLAND. ANY MATERIAL OR DEBRIS ACCIDENTALLY DROPPED INTO THE CHANNEL SHALL BE IMMEDIATELY AND COMPLETELY REMOVED AND DEPOSITED IN AN UPLAND AREA.
- 5. THE CONTRACTOR SHALL COVER TEMPORARY STOCKPILES OF ERODIBLE MATERIAL (SUCH AS TOPSOIL OR EARTH FILL) WITH POLY SHEETING, OR RING THE STOCKPILES WITH SILT FENCE TO CONTROL EROSION. POLY SHEETING SHALL COMPLETELY COVER THE STOCKPILE AND BE SECURELY ANCHORED AT ALL TIMES. ANY POLY SHEETING OR SILT FENCE THAT IS DAMAGED SHALL BE PROMPTLY REPAIRED OR REPLACED AS DIRECTED BY THE ENGINEER. RINGED STOCKPILES EXPOSED OR EXPECTED TO BE EXPOSED FOR LONGER THAN 7 CALENDAR DAYS SHALL IMMEDIATELY BE STABILIZED WITH APPROPRIATE MEASURES. THE COST OF COVERING AND RINGING/STABILIZING STOCKPILES SHALL BE INCLUDED IN THE PRICE BID FOR THE CORRESPONDING STOCKPILED MATERIAL.

EMERGENCY REPAIRS

 THE CONTRACTOR SHALL PROVIDE THE LOCAL POLICE THE NAME, ADDRESS AND TELEPHONE NUMBER OF A PERSON OR PERSONS AUTHORIZED OUTSIDE THE NORMAL CONTRACT WORKING HOURS TO SECURE AND USE LABOR, MATERIAL AND EQUIPMENT FOR EMERGENCY REPAIRS TO MAKE SAFE THE ENTIRE AREA OF THE CONTRACT. DUPLICATE COPIES OF SUCH NOTICES SHALL BE FILED WITH THE RESIDENT ENGINEER. AND CITY OF PLATTSBURGH.

CONCRETE MANAGEMENT NOTES

- 1. STORE CONCRETE, GROUT, AND MORTAR UNDER COVER AND AWAY FROM DRAINAGE AREAS.
- CONCRETE TRUCKS AND TRANSFER CHUTES MAY BE WASHED OUT ON-SITE IN AN AREA APPROVED BY THE EIC. UTILIZE A CONCRETE WASHOUT TO COLLECT ALL WASH WATER AND CONCRETE WASTE.
- 3. THE WASHOUT AREA SHALL BE LOCATED AWAY FROM STORM DRAINS, OPEN DITCHES OR WATER BODIES.
- UPON COMPLETION OF THE CONCRETE WORK, BREAK UP, REMOVE, AND HAUL AWAY SOLID CONCRETE THAT HAS ACCUMULATED IN THE WASHOUT.
- PREVENT WET OR FRESH CONCRETE OR LEACHATE FROM REACHING WATERS OF NYS. DO NOT WASH CONCRETE TRUCKS, MIXERS, OR ANY OTHER DEVICES AT A LOCATION THAT LEADS TO WATERS OF NYS.

FUEL AND EQUIPMENT STORAGE NOTES

- ALL CONSTRUCTION MATERIALS AND EQUIPMENT SHALL BE STORED IN AN AREA APPROVED BY THE ENGINEER.
- FUEL STORAGE SHALL BE CONDUCTED IN ACCORDANCE WITH APPLICABLE LOCAL, STATE, AND FEDERAL REGULATIONS.
- 3. ON SITE VEHICLE AND EQUIPMENT FUELING SHOULD ONLY OCCUR IN A DESIGNATED FUEL STORAGE AREA. SUBSTITUTE LOCATIONS MAY BE USED SUBJECT TO APPROVAL BY THE ENGINEER.
- 4. VEHICLE AND EQUIPMENT FUELING (INCLUDING FUELING OF HAND HELD EQUIPMENT) SHALL BE CONDUCTED IN ACCORDANCE WITH THE FOLLOWING:
 - A. AWAY FROM STORM DRAIN INLETS, DRAINAGE FACILITIES, OR WATERCOURSES.
 - B. WITHIN A BERMED AREA TO PREVENT RUN-ON, RUNOFF, AND TO CONTAIN SPILLS.
 - C. STORE PORTABLE FUEL CONTAINERS FOR HAND HELD EQUIPMENT IN A TUB OR EQUIVALENT DEVICE TO AVOID SPILLS AND LEAKS.
 - D. USE SECONDARY CONTAINMENT TECHNIQUES FOR FUELING OF HAND HELD OR PORTABLE EQUIPMENT, SUCH AS DRAIN PANS OR DROP CLOTHS TO CATCH SPILLS OR LEAKS.
 - E. SIGNAGE THAT FUEL TANKS SHOULD NOT BE "TOPPED OFF". AN ADEQUATE SUPPLY OF SPILL CLEAN UP MATERIALS SHALL BE READILY ACCESSIBLE TO ALL FUELING ACTIVITIES.

ASBESTOS

ALL SITES HAVE BEEN SCREENED FOR THE PRESENCE OF ASBESTOS CONTAINING MATERIALS. NONE WERE FOUND BUT MAY STILL EXIST. IF THE CONTRACTOR ENCOUNTERS SUSPECT MATERIALS, NOTIFY THE ENGINEER IN CHARGE IMMEDIATELY. IF NECESSARY, SCREENING, TESTING, AND ABATEMENT WILL BE PERFORMED AND PAID UNDER FORCE ACCOUNT.



C&S Engineers, Inc.

21 Arkansas Street Plattsburgh, New York 12903 Phone: 315-455-2000 Fax: 315-455-9667 www.cscos.com



AL PEDESTRIAN SAFETY ACTION PLAN CITY OF PLATTSBURGH INTON COUNTY, NEW YORK

MARK DATE DESCRIPTION
REVISIONS

占

PROJECT NO: A54,001,001

DATE: OCTOBER 2021

DRAWN BY: MNG

DESIGNED BY: KAN

CHECKED BY: TEH

OCA

NO ALTERATION PERMITTED HEREON EXCEPT AS PROVIDED UNDER SECTION 7209 SUBDIVISION 2 OF THE NEW YORK EDUCATION LAW

GENERAL NOTES

GNN-1

Copyright ©

	TABLE OF QUANTITIES									
ITEM	DESCRIPTION	UNIT	BASE BID QUANTITIES		ADD ALTERNATE #1 QUANTITIES		ADD ALTERNATE #2 QUANTITIES		ADD ALTERNATE #3 QUANTITIES	
			PROP.	AS-BUILT	PROP.	AS-BUILT	PROP.	AS-BUILT	PROP.	AS-BUILT
203.02	UNCLASSIFIED EXCAVATION AND DISPOSAL	CY	110		5		7		48	
203.03	EMBANKMENT IN PLACE	CY	10		0		0		0	
206.03 209.1702	CONDUIT EXCAVATION AND BACKFILL INCLUDING SURFACE RESTORATION DRAINAGE STRUCTURE INLET PROTECTION. GRAVEL BAG - TEMPORARY	LF CY	95 2		35 0.5		35 0.5		60 1	
	SUBBASE COURSE, TYPE 2	CY	65		0.5		0.5		27	
	PLANT PRODUCTION QUALITY ADJUSTMENT TO HMA ITEMS	QU	2		0		0		0	
	9.5 F2 TOP COURSE HMA, 80 SERIES COMPACTION	TON	5		0		0		2	
	25 F9 BINDER COURSE HMA, 80 SERIES COMPACTION 37.5 F9 BASE COURSE HMA, 80 SERIES COMPACTION	TON	7 27		0		0		3 10	
	DILUTED TACK COAT	GAL	118		0		0		42	
	ASPHALT PAVEMENT JOINT ADHESIVE	LF	560		0		0		200	
608.0101	CONCRETE SIDEWALKS AND DRIVEWAYS	CY	16		5		7		15	
608.020102	HOT MIX ASPHALT (HMA) SIDEWALKS, DRIVEWAYS, AND BICYCLE PATHS, AND VEGETATION CONTROL STRIPS	TON	4		0		0		0	
	CAST IRON EMBEDDED DETECTABLE WARNING UNITS CAST-IN-PLACE CONCRETE CURB TYPE VF150	SY	12 168	+	8 0		7		9 96	
	CAST-IN-PLACE CONCRETE CURB TYPE M150	LF	121		0		0		26	
	TURF ESTABLISHMENT - PERFORMANCE	SY	41		0		0		9	
619.01	BASIC WORK ZONE TRAFFIC CONTROL	LS	NEC		NEC		NEC		NEC	
	TYPE III CONSTRUCTION BARRICADE	EA	32		12		8		16	
	MAINTAIN TRAFFIC SIGNAL EQUIPMENT (REQUIREMENT C)	INTM	2		1		1		1	
	SURVEY OPERATIONS CUTTING PAVEMENT	LS LF	NEC 98		NEC 0		NEC 0		NEC 0	
635.0103	CLEANING AND PREPARATION OF PAVEMENT SURFACES - LINES	LF	1985		2180		890		2680	
	GROUND-MOUNTED SIGN PANELS LESS THAN OR EQUAL TO 30 SF, WITH Z-BARS	SF	20		0		0		0	
645.81	TYPE A SIGN POSTS	EA	5		0		1		0	
	POLE MOUNTED SIGN SUPPORT SYSTEM (BAND MOUNTED)	EA	1		1		0		0	
647.31	RELOCATE SIGN PANEL, SIGN PANEL ASSEMBLY SIZE I (UNDER 30 SQUARE FEET)	EA	1		0		1		0	
	REMOVE AND DISPOSE GROUND MOUNTED TYPE A SIGN SUPPORT(S), FOUNDATIONS, AND ANY ATTACHED SIGNS - SIZE I (UNDER 30 SF) POLE EXCAVATION AND CONCRETE FOUNDATION	EA CY	3.6		1.6		1.6		1.2	
	PULLBOX - RECTANGULAR, 26" X 18", REINFORCED CONCRETE	EA	4		0		5		5	
	CONDUIT, METAL STEEL, ZINC COATED, 2 NPS	LF	95		35		35		60	
	CONDUIT, METAL STEEL, ZINC COATED, 3 NPS	LF	485		120		320		330	
680.53	CONDUIT JACKING OR BORING	LF	485		120		320		330	
680.6708 680.700603	TRAFFIC SIGNAL POLE POST TOP MOUNT, 8 FEET MOUNTING HEIGHT RISER ASSEMBLY, 1/2" DIAMETER	EA EA	9		0		0		3	
	SIGNAL CABLE 7 CONDUCTORS, 14 AWG	LF LF	2140		900		880		1000	
	MODIFY TRAFFIC SIGNAL INSTALLATION, LOCATION 1	ELOC	1		0		0		0	
680.77000205	MODIFY TRAFFIC SIGNAL INSTALLATION, LOCATION 2	ELOC	0		0		0		1	
	ALTER PULLBOX FOR CONDUITS	EA	5		4		0		0	
	REMOVE TRAFFIC SIGNAL INSTALLATION, LOCATION 1 REMOVE TRAFFIC SIGNAL INSTALLATION, LOCATION 2	ELOC	1 0		0		0		0 1	
	NEMA TS 2 SOLID STATE MENU DRIVEN ACTUATED TRAFFIC SIGNAL CONTROLLER AND CABINET	EA	0		0		0		1	
680.813103	PEDESTRIAN SIGNAL SECTION - TYPE 1, 12 INCH	EA	26		16		16		16	
	PEDESTRIAN SIGNAL MODULE - 12 INCH, BI-MODAL HAND/MAN SYMBOLS, LED	EA	13		8		8		8	
	ACCESSIBLE PEDESTRIAN SIGNAL (APS) WITHOUT POLE	EA	16		8		8		8	
	PEDESTRIAN SIGNAL BRACKET MOUNT ASSEMBLY	EA	0		0		0		1	
	PEDESTRIAN SIGNAL POST TOP MOUNT ASSEMBLY PEDESTRIAN COUNTDOWN TIMER MODULE	EA EA	9 13		8		8		3 8	
	OVERHEAD SIGN ASSEMBLY, TYPE D	EA	4	1	1		1		3	
	OVERHEAD SIGN ASSEMBLY, TYPE G	EA	1	1	0		0		0	
	TRAFFIC SIGNAL SERVICE ENTRANCE	EA	0		0		0		1	
	FURNISH AND INSTALL ELECTRICAL DISCONNECT GENERATOR TRANSFER SWITCH	EA	0		0		0		1	
	SERVICE CABLE 2 CONDUCTOR NO. 06 AWG METER CABINET	LF EA	0	1	0		0		30 1	
	EPOXY REFLECTORIZED PAVEMENT STRIPES 20 MILS - HAND WORK	LF	2510	+	1220	+	1160		1610	
	FIELD CHANGE PAYMENT	DC	10000	1	4000		4000		4000	
	ASPHALT PRICE ADJUSTMENT	DC	100		0		0		0	
	FUEL PRICE ADJUSTMENT	DC	100		0		0		0	
	STEEL/IRON PRICE ADJUSTMENT	DC	100	1	0	-	0		0	
699.040001	MOBILIZATION	LS	NEC	1	NEC		NEC	1	NEC	

NOTE: BASE BID INCLUDES WORK AT THE CORNELIA/BROAD AND CORNELIA/PROSPECT INTERSECTIONS. ADD ALTERNATE #1 INCLUDES WORK AT THE CORNELIA/BROAD AND CORNELIA/PROSPECT INTERSECTIONS. ADD ALTERNATE #3 INCLUDES WORK AT THE CORNELIA/NORTH CATHERINE INTERSECTION. ADD ALTERNATE #3 INCLUDES WORK AT THE CORNELIA/NORTH CATHERINE INTERSECTION. ADD ALTERNATE #3 INCLUDES WORK AT THE CORNELIA/PROSPECT INTERSECTIONS. ADD ALTERNATE #3 INCLUDES WORK AT THE CORNELIA/NORTH CATHERINE INTERSECTION. ADD ALTERNATE #3 INCLUDES WORK AT THE CORNELIA/PROSPECT INTERSECTIONS. ADD ALTERNATE #3 INCLUDES WORK AT THE CORNELIA/PROSPECT INTERSECTION.



C&S Engineers, Inc. 21 Arkansas Street Plattsburgh, New York 12903 Phone: 315-455-2000 Fax: 315-455-9667 www.cscos.com



LOCAL PEDESTRIAN SAFETY ACTION PLAN CITY OF PLATTSBURGH CLINTON COUNTY, NEW YORK

MARK DATE DESCRIPTION

REVISIONS

 PROJECT NO:
 A54,001,001

 DATE:
 OCTOBER 2021

 DRAWN BY:
 MNG

 DESIGNED BY:
 KAN


 CHECKED BY:
 TEH


NO ALTERATION PERMITTED HEREON EXCEPT AS PROVIDED UNDER SECTION 7209 SUBDIVISION 2 OF THE NEW YORK EDUCATION LAW

ESTIMATE OF QUANTITIES

EQ-1


SHEET 4 OF 20

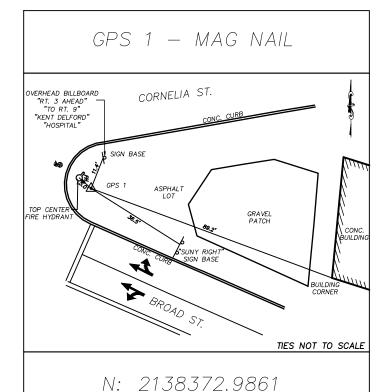

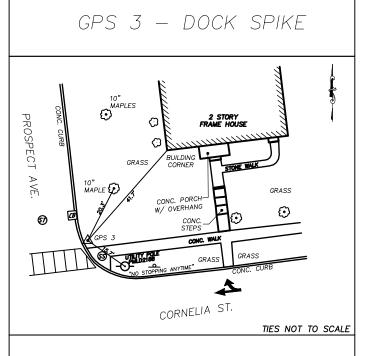


N: 2138747.4074 E: 760847.4649

CORNELIA ST.

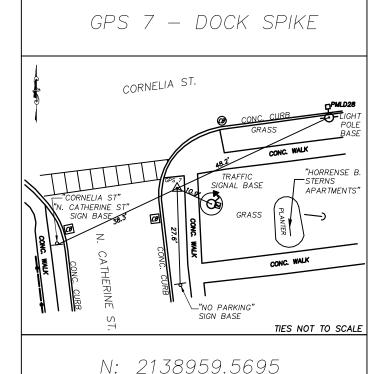

E: 762989.4489

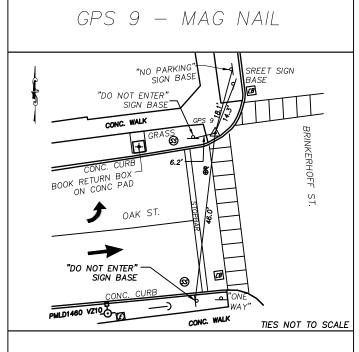

N: 2138241.0927 E: 763748.4683

GENERAL NOTES:

36" HICKORY

2' DIA.— CONC BASE

GRASS

 \oplus

GRASS

 \odot

 COORDINATES ARE REFERENCED TO NORTH AMERICAN DATUM OF 1983, (NAD83/ 2011), NEW YORK STATE PLANE COORDINATE SYSTEM EAST ZONE (3101).

GPS 5 - DOCK SPIKE

@

TIES NOT TO SCALE

- 2. THE VERTICAL DATUM REFERENCED TO THE NORTH AMERICAN VERTICAL DATUM OF 1988.
- 3. CONTOUR INTERVAL = 1 FOOT.
- . INFORMATION SHOWN HEREON IS FROM A FIELD SURVEY COMPLETED BY M.J. ENGINEERING AND LAND SURVEYING P.C. ON AUGUST 5TH THROUGH AUGUST 9TH, 2019.
- 5. UNDERGROUND UTILITIES SHOWN HEREON WERE LOCATED BASED ON VISIBLE EVIDENCE AT GROUND LEVEL ONLY AND DO NOT PURPORT TO SHOW ALL UTILITIES, ANY AND ALL UTILITIES SHOWN ARE SUBJECT TO VERIFICATION BY EXCAVATION.
- 6. UNAUTHORIZED ALTERATIONS OR ADDITION TO THIS SURVEY MAP IS A VIOLATION OF SECTION 7209 OF THE NEW YORK STATE EDUCATION LAW. COPIES OF THIS SURVEY MAP NOT BEARING THE LAND SURVEYORS SEAL AND SIGNED WITH INK SHALL NOT BE CONSIDERED TO BE VALID COPIES.
- TRAFFIC SIGNAL CONDUITS AND DETECTION LOOPS WERE DERIVED FROM THE CITY'S RECORD PLANS AND ADDED TO THE BASE MAPPING BY C&S ENGINEERS IN FEBRUARY 2020.

	BENCHMARK TABLE					
NO.	ELEV.	DESCRIPTION	INTERSECTION			
BM 1	242.678'	X-CUT FIRE HYDRANT NHOA	CORNELIA STREET AND BROAD STREET			
BM 2	225.449'	X-CUT FIRE HYDRANT NHOA	CORNELIA STREET AND PROSPECT AVENUE			
BM 3	172.327'	X-CUT FIRE HYDRANT EAST BOLT	CORNELIA STREET AND BEEKMAN STREET			
BM 4	153.305'	EXISTING X-CUT FIRE HYDRANT SOUTHWEST BOLT	CORNELIA STREET AND N CATHERINE STREET			
BM 5	147.372'	X-CUT FIRE HYDRANT NORTHWEST BOLT	OAK STREET AND BRINKERHOFF STREET			



Plattsburgh, New York 12903
Phone: 315-455-2000
Fax: 315-455-9667



LOCAL PEDESTRIAN SAFETY
ACTION PLAN
CITY OF PLATTSBURGH
CLINTON COUNTY, NEW YORK

MARK DATE DESCRIPTION
REVISIONS
PROJECT NO: A54.001.001
DATE: OCTOBER 2021
DRAWN BY: MING
DESIGNED BY: KAN

CHECKED BY: TEH

NO ALTERATION PERMITTED HEREON
EXCEPT AS PROVIDED UNDER SECTION
7209 SUBDIVISION 2 OF THE NEW YORK
EDUCATION LAW

BASELINE TIES & BENCHMARKS

BLT-1SHEET 5 OF 20

- THE CONTRACTOR SHALL MAINTAIN TRAFFIC THROUGHOUT THE LENGTH OF THE CONTRACT IN ACCORDANCE WITH THE REQUIREMENTS OF SECTION 619 OF THE CURRENT NYSDOT STANDARD SPECIFICATIONS, THE NATIONAL MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) WITH THE NEW YORK STATE (NYS) SUPPLEMENT AND AS ORDERED BY THE RESIDENT ENGINEER.
- THE TYPICAL DETAILS DEPICTED IN THE STANDARD SHEETS REFLECT THE MINIMUM REQUIREMENTS, UNLESS OTHERWISE DIRECTED BY THE RESIDENT ENGINEER.
- PRIOR TO THE START OF ANY WORK OPERATIONS, ALL RELATED WORK FOR PROPOSED TEMPORARY TRAFFIC CONTROL SHALL BE COMPLETE. THIS INCLUDES BUT IS NOT LIMITED TO, ALL SIGNS, SIGNALS, PAVEMENT MARKINGS, BARRIERS, DELINEATION (CONES, DRUMS, ETC.), FLAGGERS, PAVEMENT MODIFICATIONS, AND ANY OTHER RELATED WORK AS DIRECTED BY THE RESIDENT
- 5. WEEDS, SHRUBBERY, CONSTRUCTION MATERIALS, EQUIPMENT, VEHICLES OR WORKERS SHALL NOT OBSCURE TRAFFIC CONTROL DEVICES OR OBSTRUCT TRAFFIC. THE CONTRACTOR SHALL BE REQUIRED TO TRIM ANY FOLIAGE OBSTRUCTING THE VISIBILITY OF ANY TRAFFIC CONTROL DEVICES WHETHER PERMANENT, TEMPORARY OR CONSTRUCTION.
- THE CONTRACTOR SHALL COORDINATE ANY WORK WITH OTHER CONTRACTORS, UTILITY COMPANIES, OR MUNICIPALITIES IN ORDER TO ENSURE ALL TRAFFIC IS PROPERLY AND SAFELY MAINTAINED AND PROTECTED AT ALL TIMES.
- 7. PAYMENT FOR ALL WORK ZONE TRAFFIC CONTROL SHALL BE UNDER ITEM 619.01, WITH THE EXCEPTION OF TYPE III BARRICADES, WHICH SHALL BE PAID FOR UNDER ITEM 619.04.

SIGNS

- ALL SIGNS AND TRAFFIC CONTROL DEVICES SHALL BE IN ACCORDANCE WITH THE NATIONAL MUTCD WITH NYS SUPPLEMENT. THE LOCATIONS OF THE SIGNS SHOWN ON THE NYSDOT STANDARD SHEETS MAY BE ADJUSTED BASED ON SIGHT DISTANCE AND OTHER CONSIDERATIONS. THE FINAL LOCATIONS OF SIGNS ARE SUBJECT TO THE APPROVAL OF THE RESIDENT ENGINEER.
- ANY EXISTING SIGNS, INCLUDING OVERHEAD SIGNS, WHICH CONFLICT WITH THE TEMPORAR' TRAFFIC CONTROL SIGN LAYOUT SHALL BE COVERED, REMOVED, STORED OR RESET, AOBE. BLANK COVERS USED TO COVER PORTIONS OF EXISTING SIGNS SHALL BE OF A COLOR AND REFLECTORIZED MATERIAL MATCHING THAT OF THE SIGN BEING PARTIALLY COVERED. THE CONTRACTOR SHALL BE LIABLE FOR ANY DAMAGE TO SIGNS CAUSED BY THE METHODS USED TO TEMPORARILY REMOVE, RELOCATE OR COVER SIGN PANELS OR SIGN TEXT, AT NO ADDITIONAL COST TO THE CITY. ALL APPROPRIATE EXISTING SIGNS SHALL BE RESTORED TO THEIR ORIGINAL CONDITION AND/OR LOCATION UNLESS OTHERWISE REPLACED IN THIS CONTRACT.
- 3. SIGNS AT OR NEAR INTERSECTIONS SHALL BE PLACED SO THAT THEY DO NOT OBSTRUCT A MOTORIST'S LINE OF SIGHT.
- ALL CONSTRUCTION SIGNS SHALL BE MOUNTED ON NCHRP350 APPROVED TEMPORARY SIGN SUPPORTS UNLESS SHIELDED BY TEMPORARY CONCRETE BARRIER OR GUIDE RAIL, AND LOCATED BEYOND THE DEFLECTION DISTANCES.
- 5. IF CONSTRUCTION RELATED TRAFFIC CONGESTION BACKS UP BEYOND THE INSTALLED ADVANCE SIGN SEQUENCE, ADDITIONAL ADVANCE SIGNING SHALL BE PLACED IN ADVANCE OF THE CONGESTION. REFER TO SECTION 619-3.02(H)(5) OF THE STANDARD SPECIFICATIONS REGARDING THE USE OF "BE PREPARED TO STOP" SIGNS.
- UNDER NO CIRCUMSTANCES SHALL A SIGN PANEL BE TRUNCATED OR TRIMMED SO THAT IT WILL NOT INTERFERE WITH TRAVEL WAY. IF THIS CONDITION EXISTS, THE RESIDENT ENGINEER WILL DIRECT THE CONTRACTOR TO RELOCATE THAT SIGN AS NOT TO CAUSE ANY OBSTRUCTION WITH THE TRAVEL WAY.
- WARNING FLAGS ON SIGNS MAY BE USED TO INCREASE TARGET VALUE AND VISIBILITY OF WORK ZONE SIGNS DURING DAYLIGHT HOURS.

DELINEATION AND GUIDING DEVICES

- WHERE POSSIRIE ALL DELINEATION AND CHIDING DEVICES ARE TO BE PLACED SO AS TO PROVIDE A MINIMUM 2'-0" LATERAL CLEARANCE TO THE TRAVELED WAY.
- DEFORMED OR DAMAGED CHANNELIZING DEVICES THAT DO NOT MAINTAIN APPEARANCE. COLOR AND REFLECTIVITY WILL BE EVALUATED FOR ACCEPTABILITY IN ACCORDANCE WITH THE AMERICAN TRAFFIC SAFETY SERVICES ASSOCIATION (ATSSA) "QUALITY GUIDELINES FOR WORK ZONE TRAFFIC CONTROL DEVICES". AS THE CONDITION OF DEVICES DETERIORATES OVER TIME. THOSE THAT FALL BELOW THE MARGINAL CATEGORY SHALL BE REPLACED.

LANE WIDTHS

EXISTING LANE WIDTHS OF ROADWAYS SHOULD BE MAINTAINED THROUGH THE WORK ZONE TRAVELWAYS WHENEVER PRACTICAL. WHEN CONDITIONS REQUIRE A REDUCTION IN LANE WIDTH, THE MINIMUM WIDTHS FOR WORK ZONE TRAVEL LANES SHALL BE 10FT.

CONTRACTOR VEHICLES

- VEHICLES BELONGING TO THE CONTRACTOR OR THE CONTRACTOR'S WORKERS SHALL NOT BE PARKED ON THE PAVEMENT OR SHOULDERS ALONG THE ROADWAY WHERE PARKING IS NOT
- VEHICLES BELONGING TO THE CONTRACTOR OR THE CONTRACTOR'S EMPLOYEES SHALL NOT BE PARKED IN A MANNER WHICH OBSTRUCTS SIGNS, BARRIERS, BARRICADES, OTHER TRAFFIC CONTROL DEVICES.

LANE CLOSURES

- 1. THE CONTRACTOR SHALL START SHORT TERM LANE CLOSURES TO PROVIDE OPTIMUM VISIBILITY, LE BEFORE CURVES AND CRESTS. TO THE EXTENT PROJECT AND TRAFFIC CONDITIONS PERMIT.
- 2. IF, IN THE OPINION OF THE ENGINEER, SHORT TERM LANE CLOSURES ARE CREATING EXCESSIVE DELAYS TO TRAFFIC OR ARE CREATING A SAFETY CONCERN DUE TO SLOW OR STOPPED TRAFFIC, AFFECTED LANE CLOSURES SHALL BE REMOVED AND THE ROADWAY OPENED TO TRAFFIC.
- 3. THE ENGINEER MAY REQUIRE THAT ALL LANES BE RE-OPENED AT ANY TIME IF THE ROUTE IS NEEDED FOR EMERGENCY PURPOSES. THIS COULD INCLUDE INCIDENTS AT LOCATIONS NOT WITHIN

SIGNALIZED INTERSECTIONS

- WHEN LANE CLOSURE OPERATIONS AFFECT SIGNALIZED INTERSECTIONS, THE TRAFFIC SIGNAL SHALL BE TURNED OFF BEFORE PROCEEDING WITH THE FLAGGING OPERATION AND ANY EXISTING W3-3
- 2. THE CONTRACTOR MUST RETURN THE SIGNAL TO A 3-COLOR OPERATION AT THE END OF THE WORK OPERATION. IF THE SIGNAL DOES NOT RETURN TO 3-COLOR OPERATION, THE CONTRACTOR SHALL NOTIFY THE CITY OF UTICA AND MUST CONTINUE FLAGGING UNTIL THE DPW ARRIVES AND

FLAGGERS

- WHEN FLAGGERS ARE BEING USED FOR TRAFFIC CONTROL PURPOSES, FLAGGER SIGNS (W20-7) SHALL BE PLACED ON ALL APPROACHES TO THE AREAS BEING FLAGGED. THE COST OF FLAGGER SIGNS SHALL BE INCLUDED IN THE PRICE BID FOR ITEM 619.01. BASIC WORK ZONE TRAFFIC CONTROL. FLAGGER SIGNS SHALL NOT BE USED FOR BRIEF PERIODS OF INCIDENTAL FLAGGING. FLAGGER SIGNS SHALL NOT BE VISIBLE WHEN FLAGGERS ARE NOT BEING USED.
- 2. STOP/SLOW PADDLES SHALL BE USED FOR FLAGGING AND SHALL CONFORM TO THE REQUIREMENTS IN THE MUTCD BUT SHALL BE A MINIMUM OF 2'-0". THE COST OF THESE PADDLES AND ALL FLAGGERS SHALL BE INCLUDED IN THE PRICE BID FOR ITEM 619.01, BASIC WORK ZONE
- FLAGGERS SHALL NOT POSITION THEMSELVES DIRECTLY IN THE PATH OF ONCOMING TRAFFIC. THE FLAGGER SHOULD STAND EITHER ON THE SHOULDER ADJACENT TO THE TRAFFIC BEING CONTROLLED OR IN THE CLOSED/CHANNELIZED LANE, AT ALL TIMES, THE CONTRACTOR SHALL PROVIDE FLAGGERS WITH A CLEAR ESCAPE PATH, FREE OF PARKED VEHICLES, EQUIPMENT OR OTHER OBSTACLES.
- 4. THE CONTRACTOR SHALL PROVIDE FLAGGERS WHERE SIGHT DISTANCES ARE IMPAIRED BY THE OPERATION OR IN ANY OTHER SITUATION AOBE.
- 5. FLAGGERS SHALL BE REQUIRED TO USE TWO-WAY RADIOS, WALKIE-TALKIES, OR OTHER FORMS OF ENHANCED COMMUNICATION WHEN ONE FLAGGER IS NOT VISIBLE TO THE OTHER OR IF THE ENGINEER DEEMS IT NECESSARY. ALL COSTS SHALL BE INCLUDED IN THE PRICE BID FOR ITEM 619.01. BASIC WORK ZONE TRAFFIC CONTROL.
- 6. FLAGGERS SHALL USE THE FREE HAND FOR EMPHASIS AS SHOWN IN PART 6 OF THE MUTCD. EACH FLAGGER SHALL CONTROL NO MORE THAN ONE APPROACH OF TRAFFIC UNLESS THE APPROACHES PRESENT UNUSUALLY LOW SPEEDS AND/OR UNUSUALLY LOW VOLUMES. WITH ADEQUATE SIGHT DISTANCE FOR SAFE HANDLING OF TRAFFIC, AS DETERMINED BY THE ENGINEER.
- 7. FLAGGER STATIONS SHOULD BE VISIBLE FAR ENOUGH AHEAD TO PERMIT ALL VEHICLES TO STOP. THE FLAGGER SHOULD BE STATIONED FAR ENOUGH AHEAD OF THE WORK TO WARN THEM (FOR EXAMPLE WITH HORNS, WHISTLES, ETC.) OF APPROACHING DANGER, SUCH AS VEHICLES OUT OF
- 8. WHEN A SIDE ROAD OR DRIVEWAY INTERSECTS THE HIGHWAY WITHIN THE TEMPORARY TRAFFIC CONTROL ZONE, ADDITIONAL TRAFFIC CONTROL DEVICES AND FLAGGERS SHALL BE PROVIDED.

BICYCLES AND PEDESTRIANS

- THE NEEDS AND CONTROL OF ALL ROAD USERS (MOTORISTS, BICYCLISTS, AND PEDESTRIANS WITHIN THE HIGHWAY INCLUDING PERSONS WITH DISABILITIES IN ACCORDANCE WITH THE AMERICAN WITH DISABILITIES ACT OF 1990 (ADA) TITLE II. PARAGRAPH 35.130) THROUGH A WORK ZONE SHALL BE AN ESSENTIAL PART OF THE HIGHWAY CONSTRUCTION, UTILITY WORK, MAINTENANCE, AND THE MANAGEMENT OF TRAFFIC INCIDENTS.
- 2. THE CONTRACTOR SHALL PROVIDE, DELINEATE AND MAINTAIN A USABLE TRAVEL PATH FOR PEDESTRIANS AND BICYCLISTS EITHER THROUGH OR AROUND WORK ZONES FOR THE DURATION OF THIS PROJECT. THE TRAVEL PATH SHALL COMPLY WITH THE PROVISIONS OF THE ADA GUIDELINES AND NYS HIGHWAY LAW, SECTION 316. THE CONTRACTOR MAY UTILIZE ANY COMBINATION OF THE FOLLOWING TO PROVIDE THE USABLE TRAVEL PATH: EXISTING SIDEWALKS/SHOULDERS; TEMPORARY SIDEWALKS/SHOULDERS; FINAL SIDEWALKS/SHOULDERS; AND EXISTING OR TEMPORARY SIDEWALK CURB RAMPS. THE USABLE TRAVEL PATH SHALL BE CLEARLY MARKED AND STAGED BETWEEN INTERSECTING ROADS TO ENSURE SAFE PEDESTRIAN CROSSING AND ACCESSIBILITY. PEDESTRIAN ACCESS TO RESIDENTIAL AND COMMERCIAL PROPERTIES SHALL BE MAINTAINED FOR THE DURATION OF CONSTRUCTION. PAYMENT WILL BE MADE UNDER ITEM 619.01.
- 3. THE CONTRACTOR SHALL CONDUCT WORK OPERATIONS TO MINIMIZE THE INTERRUPTION OF PEDESTRIAN TRAFFIC. THE TEMPORARY STORAGE OF CONSTRUCTION FOLIPMENT OR MATERIALS SHALL NOT BE PERMITTED ON ANY USABLE TRAVEL PATH THAT IS OPEN TO PEDESTRIAN TRAFFIC.
- 4. THE INSTALLATION OF TEMPORARY/FINAL SIDEWALK SHALL BE STAGED SO THAT WORK IS STARTED AND COMPLETED ON ONE SIDE OF THE ROAD PRIOR TO THE START OF WORK ON THE OPPOSITE SIDE OF THE ROAD. WHEN A SECTION OF THE SIDEWALK/USABLE TRAVEL PATH MUST BE CLOSED AND PEDESTRIAN TRAFFIC IS SHIFTED TO THE SIDEWALK/USABLE TRAVEL PATH ON THE OPPOSITE SIDE OF THE ROAD, PEDESTRIANS SHALL BE DIRECTED TO CROSS AT THE NEXT AVAILABLE

NIGHTTIME CONSTRUCTION

 NO NIGHT WORK WILL BE ALLOWED UNLESS PRIOR APPROVAL IS GIVEN BY THE CITY. ADDITIONAL WORK ZONE TRAFFIC CONTROL WILL BE REQUIRED INCLUDING THE ADDITION OF REFLECTIVE MATERIALS AND LIGHTING.

PAVEMENT MARKINGS

1. EXISTING MARKINGS, LETTERS AND SYMBOLS WILL BE RE-APPLIED AS NECESSARY, AOBE. PAVEMENT MARKINGS THAT HAVE BEEN OBLITERATED BY THE OPERATION OF UTILITY COMPANIES SHALL BE MAINTAINED AS ORDERED BY THE RESIDENT ENGINEER. PAYMENT WILL BE MADE UNDER ITEM 619.01.

NYSDOT STANDARD SHEETS/TEMPORARY TRAFFIC CONTROL

- THE CONTRACTOR SHALL PROVIDE APPROPRIATE WZTC USING THE NYSDOT STANDARD SHEETS LISTED ON THE COVER SHEET.
- 2. INGRESS AND EGRESS OF CONTRACTOR'S TRUCKS AND EQUIPMENT MAY REQUIRE SPOTTERS AND
- 3. MOST WORK CAN BE ACCOMPLISHED WITH DAILY INTERSECTION LANE CLOSURES PER NYSDOT STANDARD SHFFT 619-61.
- 4. IF THE CONTRACTOR'S OPERATIONS ENCROACH INTO AN INTERSECTING STREET, UTILIZE SIDEWALK AND SHOULDER CLOSURES, FOLLOWED BY LANE CLOSURES WITH FLAGGERS, AS APPROPRIATE. WORK NEAR INTERSECTIONS SHALL REQUIRE ADDITIONAL WZTC PER STANDARD SHEET 619–61.
- 5. IF SIDEWALK CLOSURES AND DETOURS CANNOT BE PROVIDED THE CONTRACTOR SHALL EMPLOY A SPOTTER TO ESCORT PEDESTRIANS THROUGH THE ACTIVE WORK AREA. PROVIDE A DELINEATED TRAVERSIBLE PATH DURING NON-WORKING HOURS

PUBLIC ACCESS

- ACCESS TO RESIDENTIAL AND COMMERCIAL DRIVEWAYS SHALL BE MAINTAINED AT ALL TIMES, UNLESS OTHER AGREEMENTS SUITABLE TO THE OWNERS, CAN BE MADE. PROPERTY OWNERS WHOSE DRIVEWAYS WILL BE MADE INACCESSIBLE SHALL BE NOTIFIED BY THE CONTRACTOR AT LEAST 24 HOURS PRIOR TO RESTRICTING USE OF THE DRIVE. THE CONTRACTOR SHALL MAINTAIN ACCESS TO COMMERCIAL DRIVEWAYS AT ALL TIMES WHEN A FACILITY IS IN USE, FOR MULTIPLE ACCESS PROPERTIES, ONLY ONE DRIVEWAY MAY BE CLOSED AT ONE TIME. ACCESS SHALL BE RESTORED TO ALL DRIVEWAYS AS SOON AS POSSIBLE.
- 2. SUITABLE RAMPS SHALL BE INSTALLED TO MAINTAIN SMOOTH TRANSITIONS FROM RESIDENTIAL AND COMMERCIAL DRIVEWAYS TO AND FROM THE WORK AREA. THE MATERIAL SHALL CONSIST OF CRUSHED STONE OR ASPHALT CONCRETE. WHICHEVER IS DEFMED MORE APPROPRIATE FOR THE CIRCUMSTANCES, AOBE. PLASTIC DRUMS OR OTHER APPROVED TRAFFIC CONTROL DEVICES SHALL BE USED TO DELINEATE THE DRIVEWAY AND TO CONTROL ACCESS DURING NON-WORKING HOURS.



C&S Engineers, Inc.

21 Arkansas Street Plattsburgh, New York 12903 Phone: 315-455-2000 Fax: 315-455-9667



SAFET F S **ESTRIAN** Д

OF PLATTSBURG N COUNTY, NEW Y <u>N</u> E CITY O Ĭ 占

PED

OCA

MARK DATE DESCRIPTION

PROJECT NO: A54,001,00 DATE: OCTOBER 2021 DRAWN BY: MNG

CHECKED BY: TEH NO ALTERATION PERMITTED HEREON EXCEPT AS PROVIDED UNDER SECTION

EDUCATION LAW

WORK ZONE TRAFFIC CONTROL


NOTES

7209 SUBDIVISION 2 OF THE NEW YORK

WZTC-1

SHEET 6 OF 20

2021

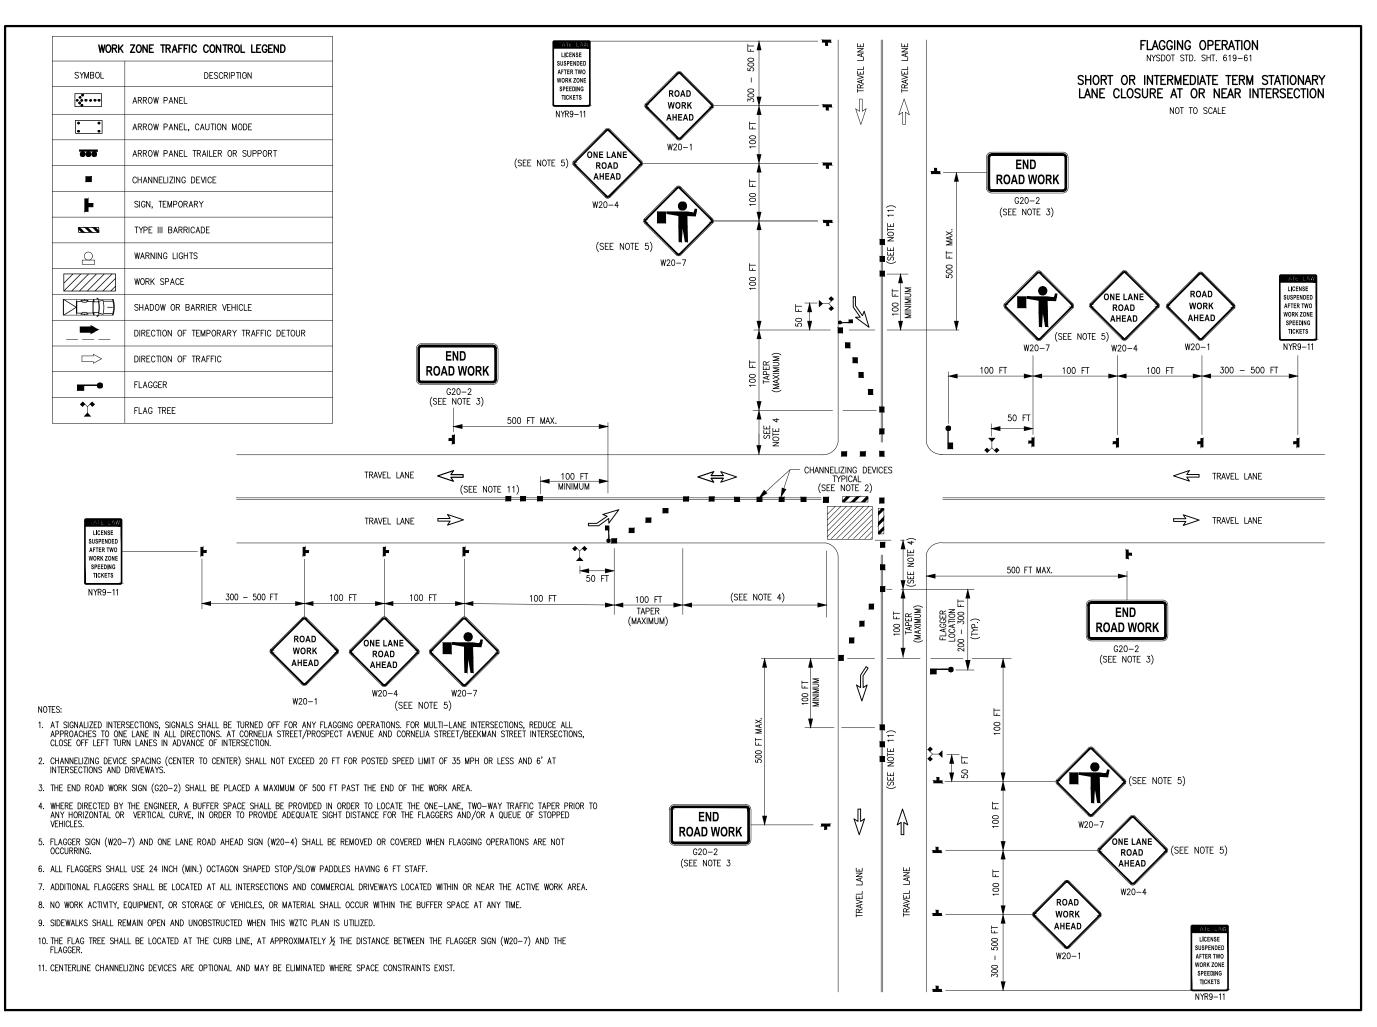



DISCOVER | DÉCOUVREZ
Plattsburgh
NEW YORK

PEDESTRIAN SAFETY ACTION PLAN Y OF PLATTSBURGH ON COUNTY, NEW YORK

OCAL

CLINTON C

 MARK
 DATE
 DESCRIPTION

 REVISIONS
 PROJECT NO:
 A54,001,001

 DATE:
 OCTOBER 2021

 DRAWN BY:
 MNG

 DESIGNED BY:
 KAN

 CHECKED BY:
 TEH


 NO ALTERATION PERMITTED HEREON

NO ALTERATION PERMITTED HEREON EXCEPT AS PROVIDED UNDER SECTION 7209 SUBDIVISION 2 OF THE NEW YORK EDUCATION LAW

> WORK ZONE TRAFFIC CONTROL PLAN

> > **WZTC-2**SHEET 7 OF 20



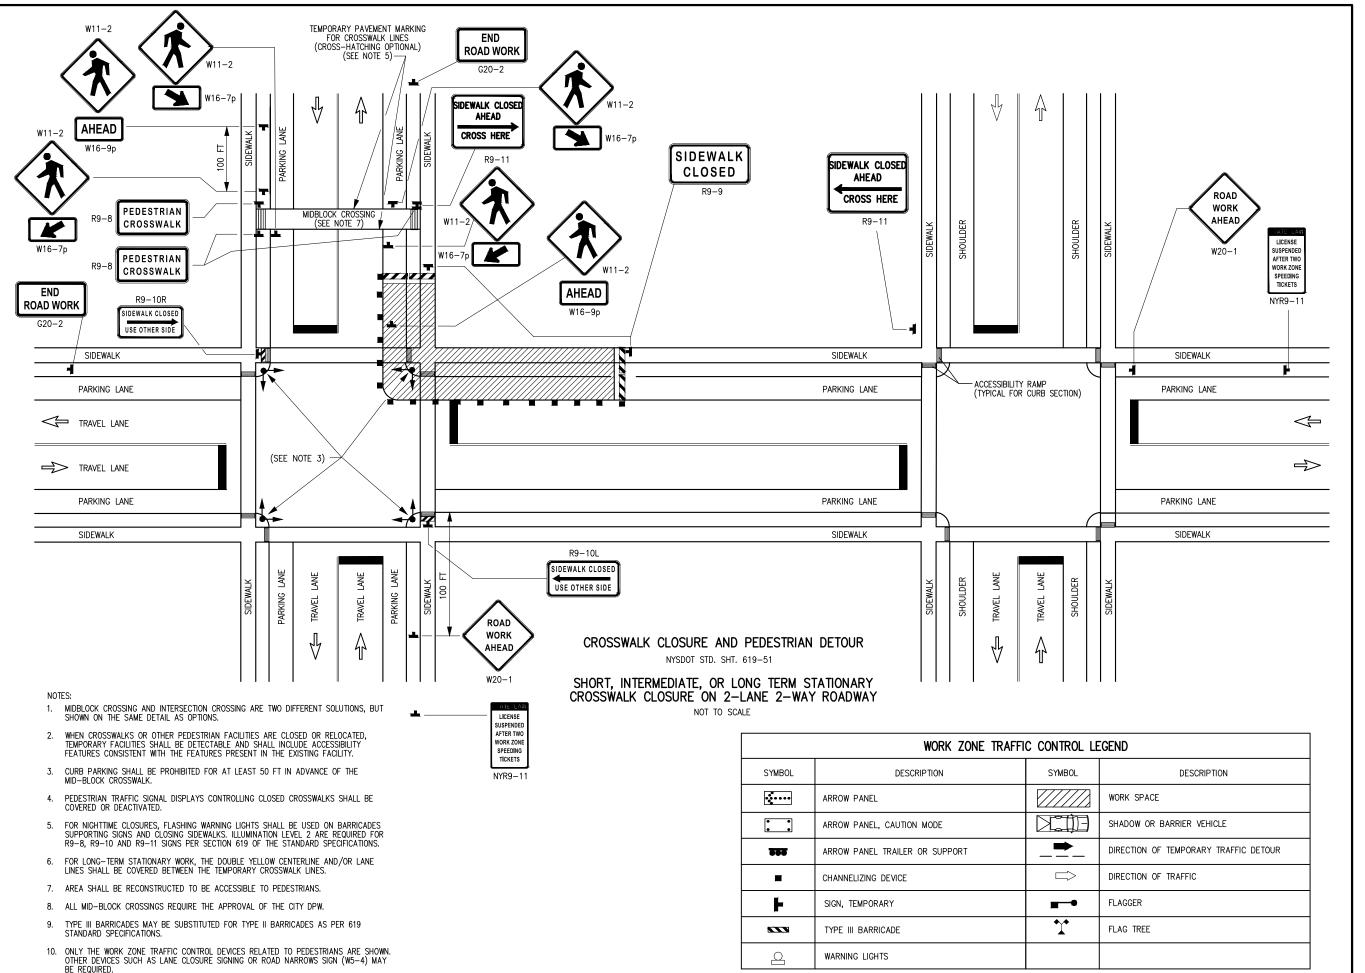



C&S Engineers, Inc. 21 Arkansas Street Plattsburgh, New York 12903

Fax: 315-455-9667

Plattsburgh

OCAL PEDESTRIAN SAFET ACTION PLAN CITY OF PLATTSBURGH CLINTON COUNTY, NEW YORK

MARK DATE DESCRIPTION
REVISIONS
PROJECT NO: A54,001,001
DATE: OCTOBER 2021
DRAWN BY: MNG
DESIGNED BY: KAN

CHECKED BY: TEH


NO ALTERATION PERMITTED HEREON
EXCEPT AS PROVIDED UNDER SECTION
7209 SUBDIVISION 2 OF THE NEW YORK
EDUCATION LAW


EDUCATION LAW

WORK ZONE TRAFFIC CONTROL PLAN


WZTC-3
SHEET 8 OF 20

- THE CONTRACTOR SHALL INSTALL NEW SIDEWALK, CURB RAMPS, AND CAST IRON EMBEDDED DETECTABLE WARNING UNITS THAT MEET ADA STANDARDS, AS SHOWN ON THE PLANS. THE NEW SIDEWALK SHALL CONNECT FLUSH TO THE EXISTING
- CURB RAMPS SHALL BE BUILT TO AND FOLLOW THE NYSDOT 608-01 STANDARD SHEETS.
- THE SIDEWALK DEPTH SHALL BE 6" FOR RADIUS SLABS AND 4" FOR ALL OTHER
- 4. ITEM 610.16010020 SHALL BE USED ADJACENT TO NEW SIDEWALK TO MATCH EXISTING CONDITIONS.
- 5. PEDESTRIAN POLES SHALL BE INSTALLED ADJACENT TO SIDEWALKS AND LANDINGS.
- 6. SEE DWGS. CRD-1 TO CRD-3 FOR CURB RAMP LAYOUTS.
- THE DETAILS AND DIMENSIONS PROVIDED ARE APPROXIMATE TO ACHIEVE ADA COMPLIANT RAMPS. THE CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND GRADES TO ENSURE COMPLIANCE WITH ADA REQUIREMENTS. SEE STANDARD SHEET 608-01 FOR CROSS SLOPE REQUIREMENTS ON ALL SIDEWALKS AND RAMPS.
- 8. IF LAYOUTS REQUIRE ADJUSTMENT DUE TO FIELD CONDITIONS, NOTIFY ENGINEER IMMEDIATELY.
- 9. SIDEWALK REMOVALS SHALL END AT AN EXISTING JOINT.
- 10. ARROWS ON RAMPS REPRESENT DOWN GRADE DIRECTION. SEE STANDARD SHEET 608-01 FOR RUNNING SLOPE REQUIREMENTS OF A CURB RAMP.
- 11. USE RADIAL CAST IRON DETECTABLE WARNING UNITS IF MANUFACTURED AT THE RADIUS OF THE CURB ABUTTING THE UNIT. DETECTABLE WARNING FIELDS COMPRISED OF CUT AND SPLICED SECTIONS SHALL NOT BE PERMITTED.
- 12. AREAS OF PERMANENT SIDEWALK REMOVAL ARE TO BE RESTORED WITH ITEM 610.16010020. IN GRASS AREAS, THE PERIMETER AREA AT PROPOSED SIDEWALK REMOVAL AND REPLACEMENT SHALL BE RESTORED WITH A 2'-0" STRIP OF ITEM
- 13. ALL DETECTABLE WARNING SURFACES SHALL BE 2'-0" BY 5'-0" MINIMUM.
- 14. NEW CURB SHALL BE FLUSH ACROSS CURB RAMP.
- 15. THE EXCAVATION DEPTH WILL BE THE DEPTH FROM THE TOP OF ROAD TO THE TOP OF EXISTING SUBBASE. ALL EXISTING PAVEMENT LAYERS ARE TO BE REMOVED AND REPLACED WITH ITEM 304.12.

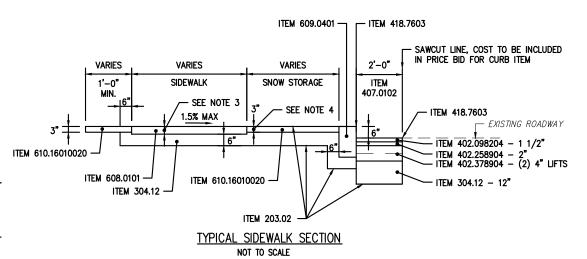

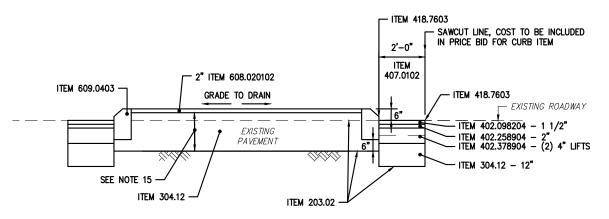


TYPICAL CURBED ASPHALT ISLAND SECTION NOT TO SCALE

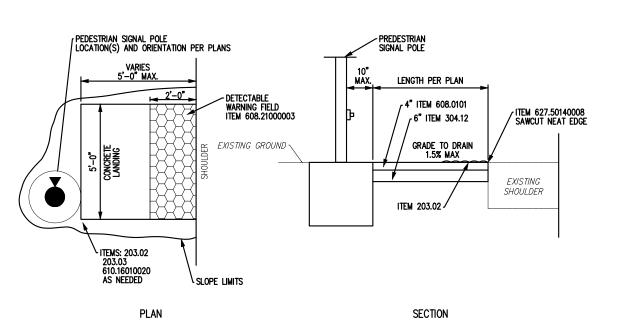

TYPICAL CONCRETE LANDING AND PUSH BUTTON REPLACEMENT


NOT TO SCALE

TYPICAL LADDER BAR TYPE L CROSSWALK DETAIL NOT TO SCALE

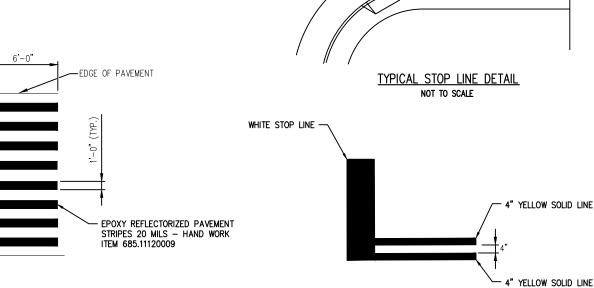

4" YELLOW SOLID LINE


DOUBLE YELLOW CENTERLINE DETAIL

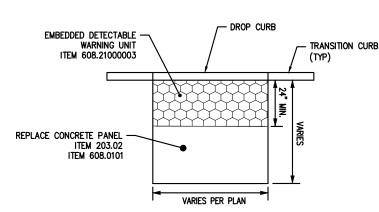

TYPICAL DETECTABLE WARNING UNIT REPLACEMENT

4'-0" MIN.

NOT TO SCALE

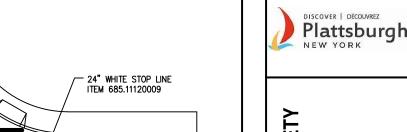

PEDESTRIAN SAFET OF PLATTSBURGH I COUNTY, NEW YO **PLAN ACTION** CITY O OCAL 딩

COMPANIES

C&S Engineers, Inc.

21 Arkansas Street

Fax: 315-455-9667

MARK DATE DESCRIPTION REVISIONS PROJECT NO: A54 001 00: DATE: OCTOBER 2021 DRAWN BY: MNG DESIGNED BY: KAN


CHECKED BY: TEH NO ALTERATION PERMITTED HEREON EXCEPT AS PROVIDED UNDER SECTION 7209 SUBDIVISION 2 OF THE NEW YORK EDUCATION LAW

MISCELLANEOUS DETAILS

> MD-1 SHEET 9 OF 20

2021 t\A54

Copyright ©

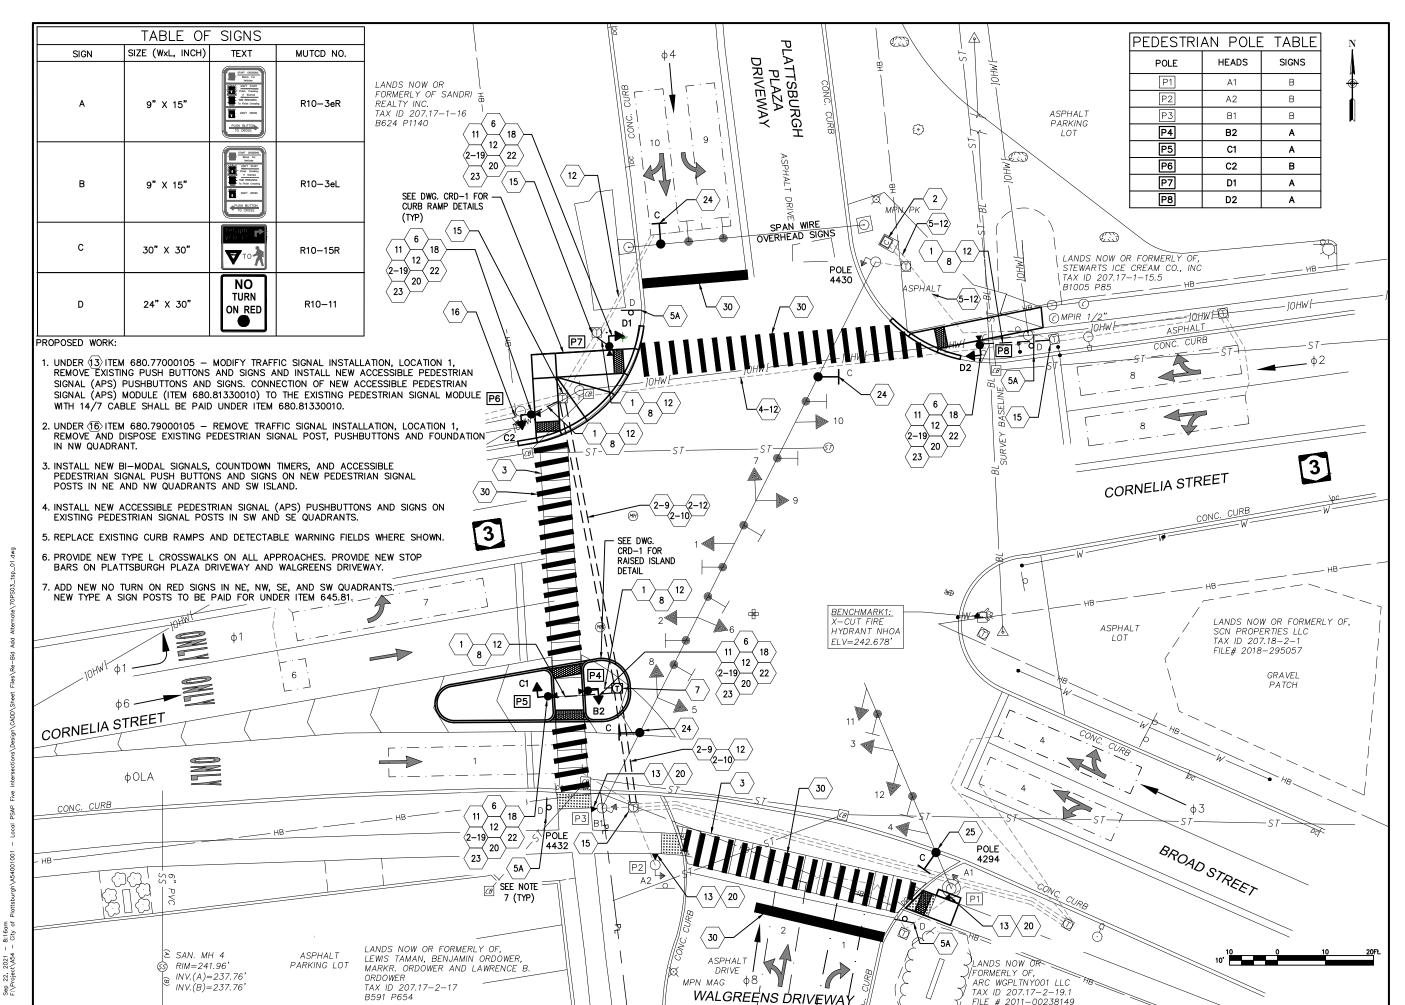





LOCAL PEDESTRIAN SAFETY ACTION PLAN CITY OF PLATTSBURGH CLINTON COUNTY, NEW YORK

MARK DATE DESCRIPTION

REVISIONS

PROJECT NO: A54,001,001

DATE: OCTOBER 2021

DRAWN BY: MNG


DESIGNED BY: KAN

CHECKED BY: TEH

NO ALTERATION PERMITTED HEREON
EXCEPT AS PROVIDED UNDER SECTION
7209 SUBDIVISION 2 OF THE NEW YORK
EDUCATION LAW

TRAFFIC SIGNAL
PLAN CORNELIA STREET
AND
BROAD STREET

TSP-1SHEET 10 OF 20

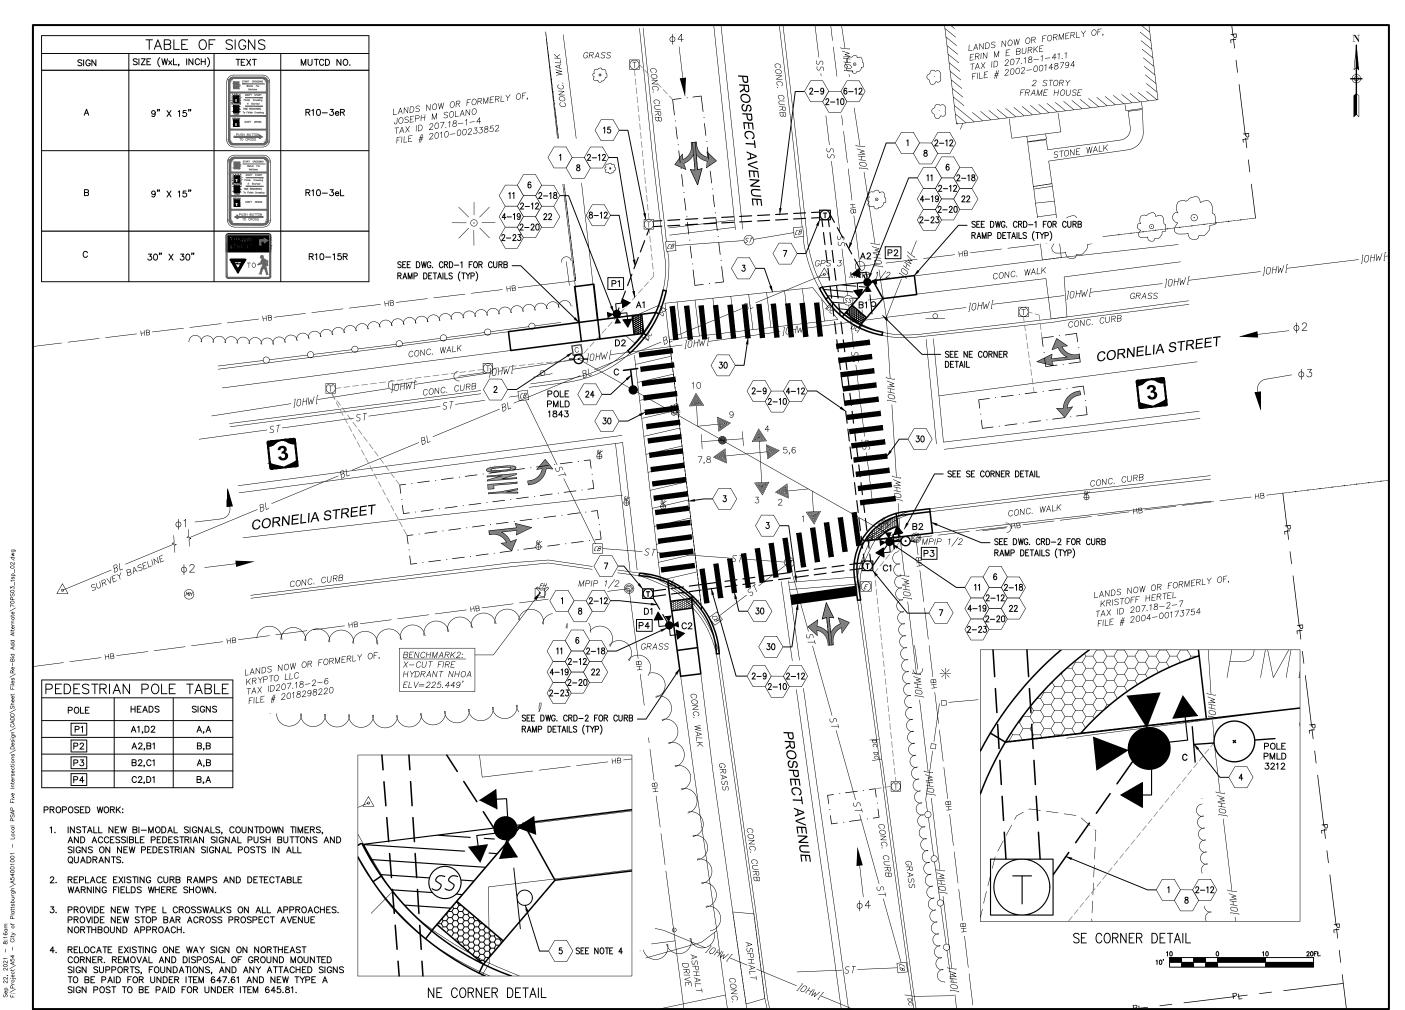





LOCAL PEDESTRIAN SAFETY ACTION PLAN CITY OF PLATTSBURGH CLINTON COUNTY, NEW YORK

MARK DATE DESCRIPTION

REVISIONS

PROJECT NO: A54,001.001

DATE: OCTOBER 2021

DRAWN BY: MING

DESIGNED BY: KAN

CHECKED BY: TEH


NO ALTERATION PERMITTED HEREON

NO ALTERATION PERMITTED HEREON
EXCEPT AS PROVIDED UNDER SECTION
7209 SUBDIVISION 2 OF THE NEW YORK
EDUCATION LAW

TRAFFIC SIGNAL

PLAN CORNELIA STREET
AND
PROSPECT AVENUE

TSP-2SHEET 11 OF 20

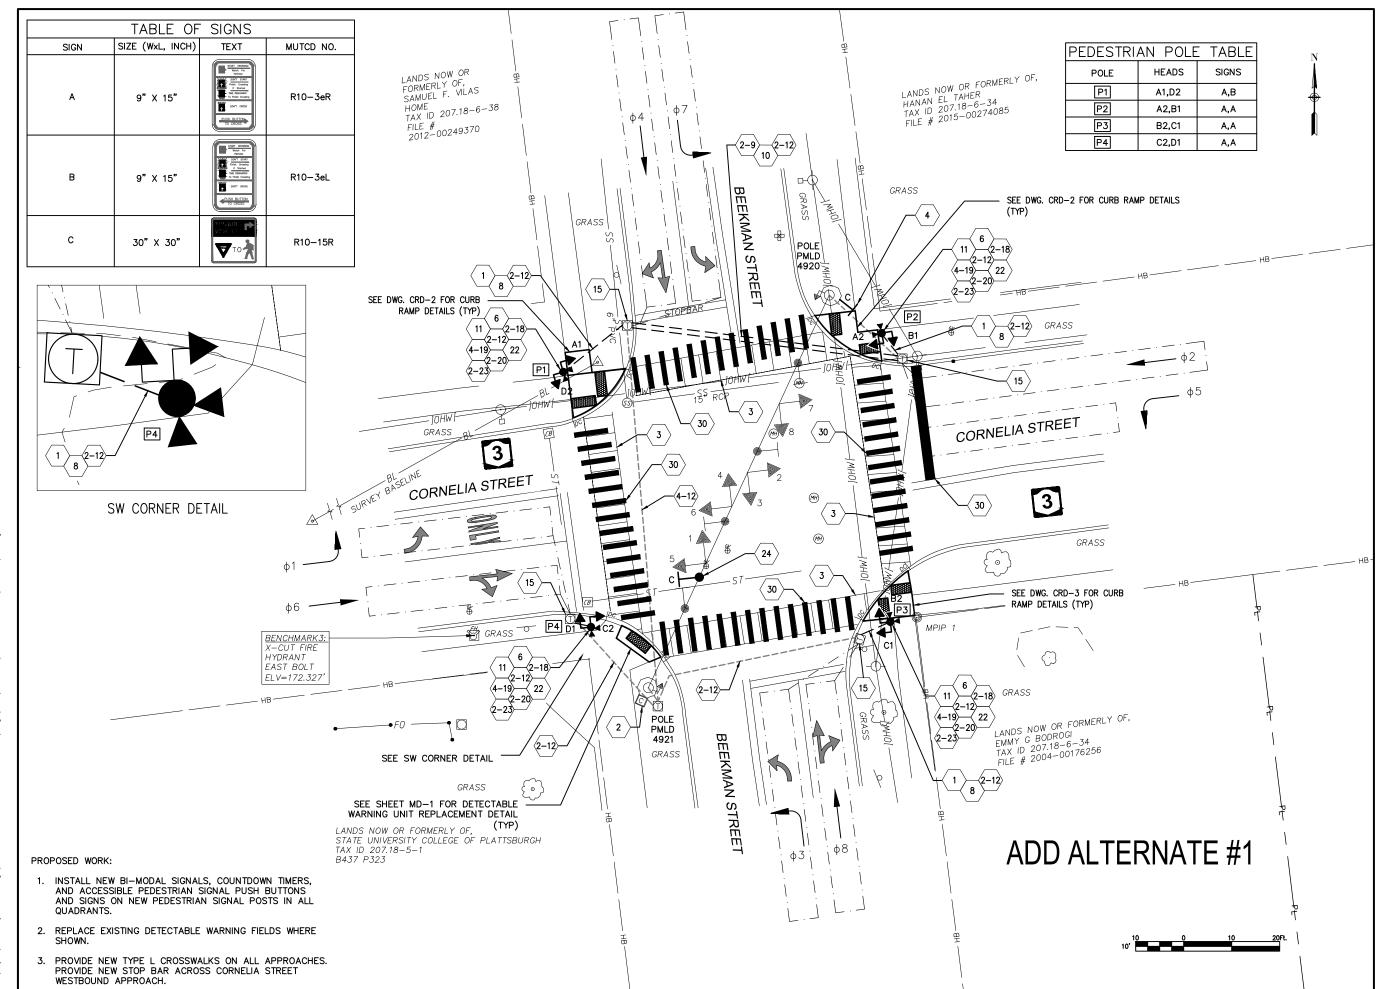

COMPANIES

C&S Engineers, Inc. 21 Arkansas Street Plattsburgh, New York 12903 Phone: 315-455-2000 Fax: 315-455-9667 www.cscos.com

Plattsburgh

LOCAL PEDESTRIAN SAFETY
ACTION PLAN
CITY OF PLATTSBURGH
CLINTON COUNTY, NEW YORK


MARK DATE DESCRIPTION
REVISIONS
PROJECT NO: A54,001.001
DATE: OCTOBER 2021
DRAWN BY: MMG
DESIGNED BY: KAN

CHECKED BY: TEH

NO ALTERATION PERMITTED HEREON
EXCEPT AS PROVIDED UNDER SECTION
7209 SUBDIVISION 2 OF THE NEW YORK
EDUCATION LAW

TRAFFIC SIGNAL
PLAN CORNELIA STREET
AND
BEEKMAN STREET

TSP-3SHEET 12 OF 20

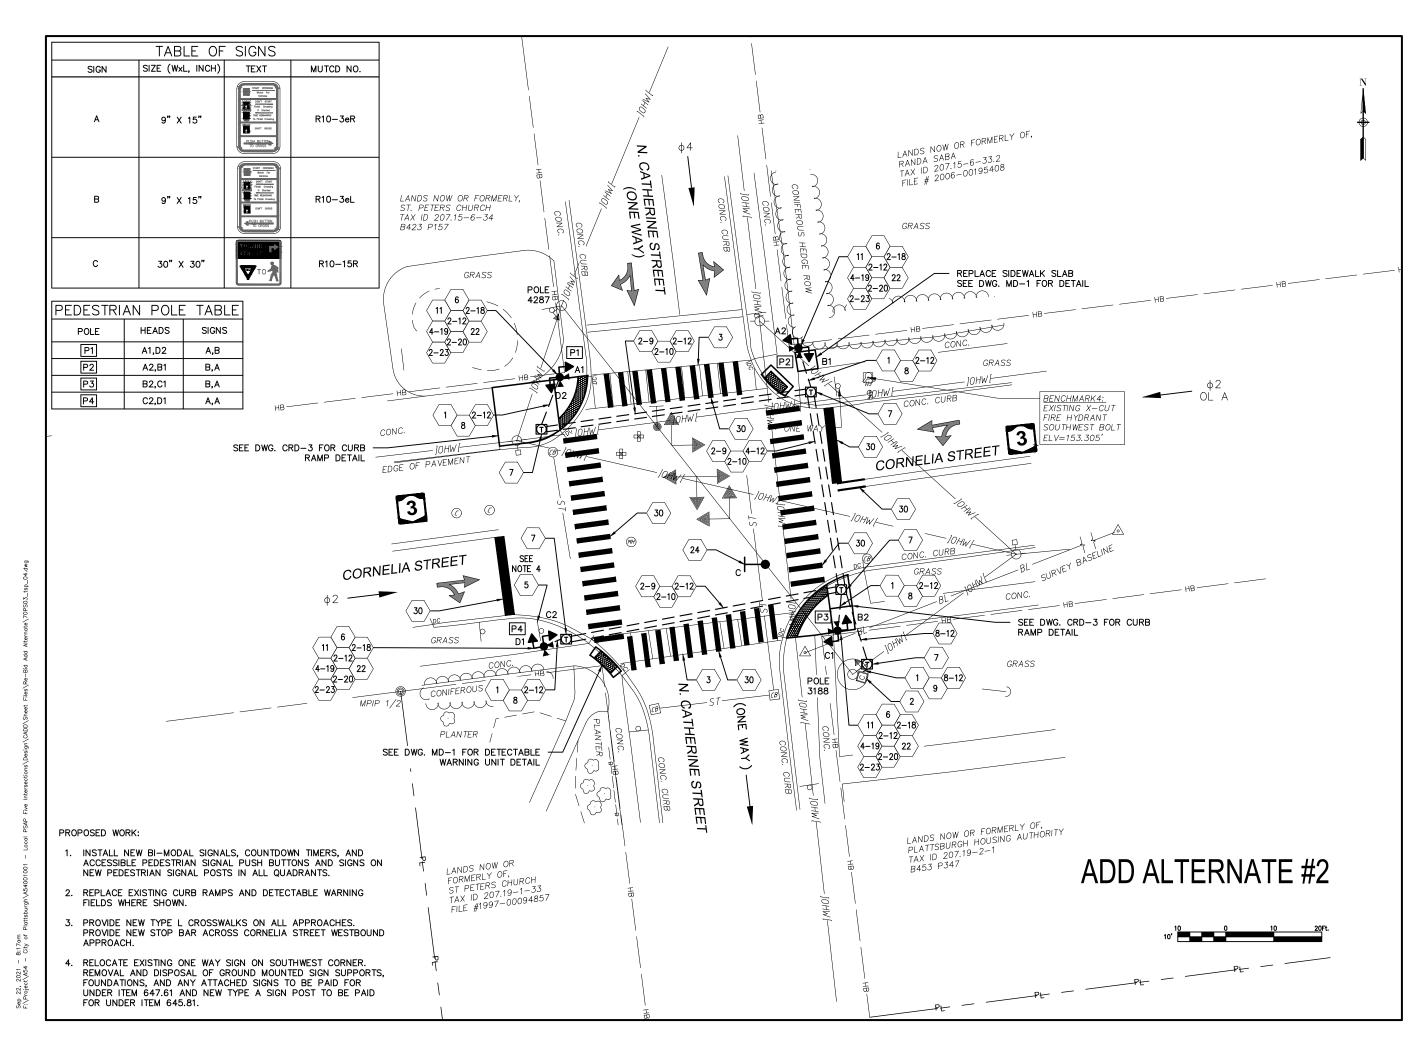





LOCAL PEDESTRIAN SAFETY ACTION PLAN CITY OF PLATTSBURGH CLINTON COUNTY, NEW YORK

MARK DATE DESCRIPTION
REVISIONS
PROJECT NO: A54,001,001
DATE: OCTOBER 2021
DRAWN BY: MNG
DESIGNED BY: KAN


CHECKED BY: TEH

NO ALTERATION PERMITTED HEREON
EXCEPT AS PROVIDED UNDER SECTION
7209 SUBDIVISION 2 OF THE NEW YORK
EDUCATION LAW

TRAFFIC SIGNAL
PLAN CORNELIA STREET
AND
N CATHERINE ST

TSP-4

SHEET 13 OF 20

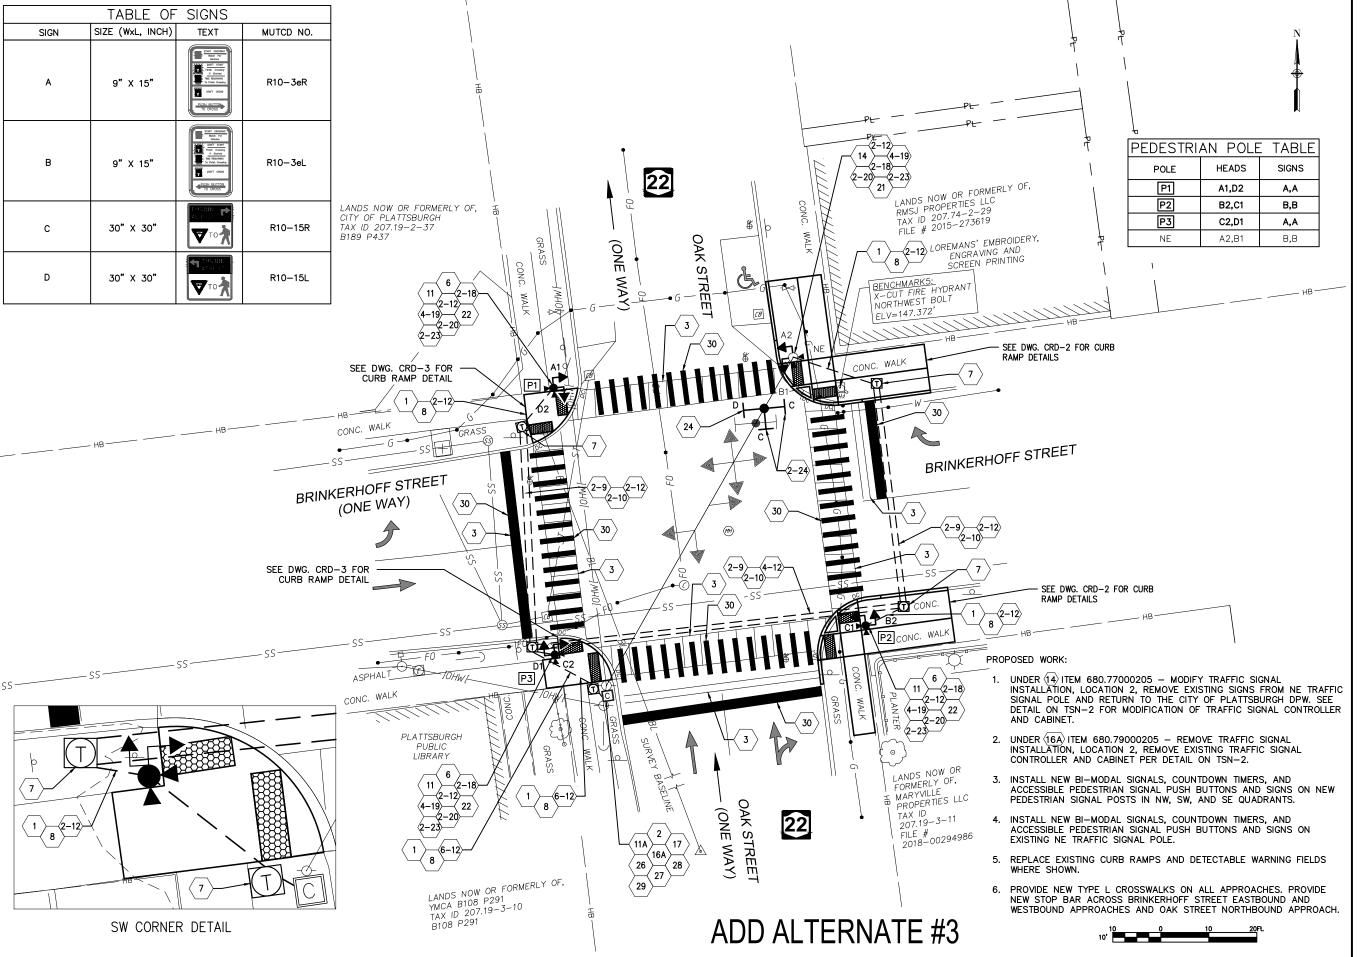

2021 t\A54



C&S Engineers, Inc. 21 Arkansas Street Plattsburgh, New York 12903 Phone: 315-455-2000 Fax: 315-455-9667



LOCAL PEDESTRIAN SAFETY ACTION PLAN CITY OF PLATTSBURGH CLINTON COUNTY, NEW YORK

MARK DATE DESCRIPTION
REVISIONS
PROJECT NO: A54,001,001

DATE: OCTOBER 2021

DRAWN BY: MNG

DESIGNED BY: KAN

CHECKED BY: TEH

NO ALTERATION PERMITTED HEREON EXCEPT AS PROVIDED UNDER SECTION 7209 SUBDIVISION 2 OF THE NEW YORK EDUCATION LAW

TRAFFIC SIGNAL
PLAN OAK STREET AND
BRINKERHOFF
STREET

TSP-5

- TEMPORARY CASING AND DRILLING MUD MAY BE REQUIRED TO EXCAVATE TO THE DESIGN ELEVATION.
- 4. EXPOSED FOUNDATION SURFACES SHALL BE FINISHED IN A WORKMAN LIKE MANNER. REINFORCEMENT BARS SHALL HAVE A MINIMUM OF 3 INCHES OF COVER. FOUNDATIONS SHALL BE AT THE SAME ELEVATION AS EXISTING OR PROPOSED FINISH WALKWAY SURFACES. FOUNDATIONS IN TURF AREAS SHALL BE 2 INCHES ABOVE FINAL GRADE.
- 5. MORTAR CAPS SHALL NOT BE USED.
- 6. BASE PLATES SHALL BE WRAPPED WITH A STAINLESS STEEL SCREEN. SCREEN OPENING SIZE SHALL BE APPROXIMATELY 1/4 INCH. THE SCREEN IS SECURED TO THE BASE PLATE WITH A STAINLESS STEEL BAND. THE SCREEN SHALL BE INSTALLED FROM THE FOUNDATION SURFACE TO JUST BELOW THE TOP OF THE BASE PLATE. THE SCREEN WRAPS THE FULL PERIMETER OF THE BASE PLATE WITH A 3 INCH OVERLAP. THE OVERLAP SHALL FACE AWAY FROM TRAFFIC.
- SIGNAL POLE FOUNDATIONS SHALL CURE A MINIMUM OF 14 DAYS BEFORE THE POLE IS ERECTED AND A MINIMUM OF 28 DAYS BEFORE THE SIGNAL HEAD ASSEMBLIES, SPAN WIRE OR MAST ARMS ARE INSTALLED.

ELECTRICAL CABLE SPLICES

- ALL CABLE SPLICES MADE IN CABLE RUNS TO BE LOCATED BELOW GROUND WILL BE ACCOMPLISHED USING METHOD NO. 2 (TWO COMPONENT ELECTRICAL INSULATING RESIN REJACKETING MATERIALS) AS DESCRIBED IN SECTION 680-3.16 OF THE N.Y.S. STANDARD SPECIFICATIONS.
- EXTRA CONDUCTORS IN SIGNAL CABLE RUNS SHALL NOT BE CUT SHORT BUT WILL BE TAPED BACK ON ITS OWN CABLE FOR FUTURE USE.
- 3. OVERHEAD CABLE SPLICES WILL NOT BE ALLOWED.

CONDUIT AND CONDUIT EXCAVATION

- CAPPED CONDUIT SHALL BE THE SIZE SHOWN ON THE PLANS AND SHALL EXTEND A MINIMUM OF 6
 FEET OUTSIDE ALL POLE FOUNDATIONS OR PULLBOXES.
- EXCAVATION FOR THE INSTALLATION OF UNDERGROUND CONDUIT IN PAVEMENT AREAS SHALL BE MADE WITH AN APPROPRIATE WHEEL EXCAVATOR. THE TRENCH WIDTH SHALL BE KEPT TO A MINIMUM AND THE DEPTH SHALL BE IN CONFORMANCE WITH THE N.Y.S. STANDARD SPECIFICATIONS.
- 3. IN PAVEMENT AREAS TRENCH BACKFILL SHALL BE CONTROLLED LOW STRENGTH MATERIAL TO THE BOTTOM OF THE ASPHALT COURSE. IT SHALL CONFORM TO THE N.Y.S. STANDARD SPECIFICATIONS.
- 4. ALL SPARE CONDUITS SHALL CONTAIN A CONTINUOUS POLY LINE TIED OFF IN THE PULL BOX AT FACH FND.
- 5. ALL CONDUIT CONNECTIONS SHALL BE WATERTIGHT.
- 6. ALL SIGNAL CONDUITS SHALL BE BONDED WITH A #6 BARE STRANDED COPPER GROUND WIRE
- ALL COUPLINGS AND BUSHINGS SHALL BE MECHANICALLY THREADED. COMPRESSION OR SLIP TYPE COUPLINGS OR BUSHINGS SHALL NOT BE ALLOWED.
- 3. WHENEVER ITEM 206.03 CONDUIT EXCAVATION AND BACKFILL INCLUDING SURFACE RESTORATION INVOLVES SAW CUTTING ACROSS THE WIDTH OF THE SIDEWALK, THE AFFECTED SLABS SHALL BE FULLY REMOVED AND REPLACED. THE COST OF THIS WORK SHALL BE INCLUDED IN THIS ITEM.

TRAFFIC SIGNAL ASSEMBLIES

1. DESIGN CLEARANCE UNDER ALL STRUCTURES SHALL HAVE A MINIMUM CLEARANCE OF 17 FEET.

GROUNDING

- ALL SIGNAL POLES OR PEDESTRIAN STATIONS SHALL BE GROUNDED IN CONFORMANCE WITH THE DETAILS SHOWN ON STANDARD SHEET 680-04, WITH THE EXCEPTION OF THE DETAIL "GROUND ROD INSTALLATION", THE "GROUND ROD INSTALLATION" DETAIL SHALL NOT BE INSTALLED IN THIS CONTRACT.
- 2. USE AT LEAST A 15 INCH DIAMETER REINFORCED CONCRETE PULLBOX FOR GROUNDING ROD INSTALLATION.
- 3. CLAY TILE PIPE DETAILED ON STANDARD SHEET 680-04 SHALL NOT BE USED.
- 4. GROUND WIRE FOR CABINETS OR POLES SHALL BE INSTALLED IN ITS OWN 1 INCH P.V.C. PLASTIC CONDUIT AND RUN TO THE NEAREST GROUND ROD LOCATION AS SHOWN ON STANDARD SHEET 680-04
- 5. CONSTRUCTION SHALL COMPLY WITH THE NATIONAL ELECTRIC CODE.
- 6. ALL GROUND TESTING SHALL BE COMPLETED AND ACCEPTED PRIOR TO SIGNAL START UP.

OVERHEAD SIGN MOUNTING

- OVERHEAD SIGNS: ALL ADDITIONAL MATERIALS REQUIRED FOR THE INSTALLATION OF OVERHEAD SIGN ASSEMBLIES SHALL BE INCLUDED IN THE PRICE BID FOR THE ITEM.
- SIGNS SHALL BE MOUNTED SO THAT THEY ARE CENTERED AND FACING THE LANES THAT THEY REGULATE, SIGNAL HEADS SHALL BE LOCATED TO ALLOW FOR THIS CENTERED PLACEMENT OF THE SIGNS
- 3. ANY LATERAL ADJUSTMENT TO PROPERLY ALIGN A STRUCTURE ON THE MAST ARM SHALL BE INCLUDED IN THE ITEMS ASSOCIATED WITH THAT STRUCTURE.

PULL BOXES

- UNLESS OTHERWISE SHOWN. ALL PULLBOXES SHALL BE INSTALLED OUTSIDE OF THE PAVEMENT OR SHOULDER AREAS.
- 2. THE FINISHED GROUND SURFACE ON A BACK SLOPE IN THE VICINITY OF THE PULLBOX SHALL BE ADJUSTED SO THAT NO FILL SHALL SPILL ON THE TOP OF THE BOX AND THE MAXIMUM DISTANCE FROM THE TOP OF THE BOX TO THE FINISHED GROUND AT THE BOX SHALL NOT EXCEED 4 INCHES. ALL MATERIALS AND LABOR NECESSARY TO COMPLETE THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR THE PULLBOX.
- 3. ALL PULLBOXES INSTALLED IN THE SIDEWALK SHALL BE FLUSH WITH THE WALK.
- 4. MAXIMUM DEPTH TO CONDUIT ENTRANCE SHALL BE 3 FEET.

WORK AFFECTING SIGNALS AND COORDINATION WITH OWNER

- . THE CONTRACTOR SHALL NOTIFY THE CITY OF PLATTSBURGH IN WRITING AT LEAST TEN (10) WORKING DAYS IN ADVANCE OF ANY OF HIS OPERATIONS THAT WILL AFFECT THE EXISTING SIGNAL, SUCH AS PAVEMENT REMOVAL OR NEW SIGNAL ITEM INSTALLATIONS. THE TRAFFIC DEPARTMENT SHALL PERFORM ALL NECESSARY WORK REQUIRED IN THE EXISTING CONTROLLER CABINET, HOWEVER, AT THE OVERHEAD REBUILD SITES THE CONTRACTOR WILL BE REQUIRED TO MAKE THE CONNECTIONS FOR THE OUTPUTS TO THE HEADS ON THE TERMINAL STRIP IN THE CABINET.
- 2. FINAL SIGNAL HEAD LOCATIONS SHALL BE FIELD REVIEWED AND APPROVED BY THE CITY OF PLATTSRURGH
- 3. ALL WIRING SHALL BE COMPLETED IN A NEAT AND WORKMAN LIKE MANNER.

ELECTRIC SERVICE ENTRANCE

- THE UNDERGROUND SERVICE DETAIL ON STANDARD SHEET 680-05 SHALL BE MODIFIED SO THAT THE NORMAL 1 NPS CONDUIT FOR UNDERGROUND SERVICE CONDUCTORS SHALL BE 2 NPS GALVANIZED STEFL HEAVY WALL CONDUIT.
- * 2. ALL SERVICE ENTRANCES SHALL HAVE A METER, METER PAN, AND AN ELECTRICAL DISCONNECT/GENERATOR TRANSFER SWITCH.
- $\ensuremath{\boldsymbol{\times}}$ 3. METER CABINET ITEM 680.95533211 SPECIFICATION SHALL BE MODIFIED TO MEET PMLD REQUIREMENTS.

CONDUITS

- 1. ALL SIGNAL CONDUITS SHALL BE BONDED WITH A #6 BARE STRANDED COPPER GROUND WIRE.
- ALL COUPLINGS AND BUSHINGS SHALL BE MECHANICALLY THREADED. COMPRESSION OR SLIP TYPE COUPLINGS OR BUSHINGS SHALL NOT BE ALLOWED.
- 3. WHENEVER ITEM 206.03 CONDUIT EXCAVATION AND BACKFILL INCLUDING SURFACE RESTORATION INVOLVES SAW CUTTING ACROSS THE WIDTH OF THE SIDEWALK, THE AFFECTED SLABS SHALL BE FULLY REMOVED AND REPLACED. THE COST OF THIS WORK SHALL BE INCLUDED IN THIS ITEM.

PEDESTRIAN SIGNALS

- ALL PEDESTRIAN PUSH BUTTONS SHALL CONFORM TO THE AMERICANS WITH DISABILITIES ACT (ADA)
 REQUIREMENTS.
- ALL PEDESTRIAN PUSH BUTTONS SHALL BE LOCATED PARALLEL WITH THE APPROPRIATE CROSSWALK. ALSO, ALL INDICATIONS SHALL BE INSTALLED AWAY FROM TURNING VEHICULAR TRAFFIC UNLESS OTHERWISE SHOWN ON THE PLAN SHEET.
- 3. ALL PEDESTRIAN SIGNS SHALL BE 9 INCHES X 15 INCHES (R10-3e) REGARDLESS OF THE SIZE OF POLE THEY ARE INSTALLED ON AND SHALL BE ALUMINUM MATERIAL. SIGNS SHALL BE MOUNTED ON YELLOW BRACKET MATCHING COLOR OF PUSH BUTTON. THE COST OF FURNISHING AND INSTALLING THESE SIGNS SHALL BE INCLUDED IN THE BID PRICE FOR ITEM 680.81330010 – AUDIBLE PEDESTRIAN SIGNAL.
- 4. ON STANDARD SHEET NO. 680-10, ONLY TOP MOUNT POST INSTALLATION SHALL BE ALLOWED.
- ON STANDARD SHEET NO. 680-10, THE PEDESTRIAN INDICATIONS SHALL BE BANDED TO THE POLE AND HAVE ONE BOLT THROUGH THE TOP BRACKET.
- 6. PEDESTRIAN HEAD HOUSINGS SHALL BE FEDERAL YELLOW IN COLOR.
- PEDESTRIAN SIGNAL HEADS SHALL BE ALUMINUM AND MANUFACTURED BY PEEK TRAFFIC CORPORATION.
- 8. STANDARD SPECIFICATION 680.67XX IS MODIFIED ALLOWING ONLY ALUMINUM TRAFFIC SIGNAL POLES UNLESS OTHERWISE SHOWN ON THE PLANS.

<u>UTILITIES</u>

- THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING ALL UTILITY WORK WITH THE RESPECTIVE OWNERS DURING CONSTRUCTION. THE COST OF THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR VARIOUS ITEMS IN THE CONTRACT.
- CONTRACTOR IS TO CONTACT DIG SAFELY NEW YORK AT 811 FOR MARK OUT OF ALL UNDERGROUND SIGNAL CONDUIT AND LOOP WIRE PRIOR TO ANY DIGGING. ANY BROKEN SIGNAL WIRE CAN NOT BE SPLICED. A NEW RUN OF WIRE FROM THE POLE TO THE FURTHEST END MUST BE REPLACED.

EMERGENCY REPAIR

 THE CONTRACTOR SHALL PROVIDE THE LOCAL POLICE THE NAME, ADDRESS, AND TELEPHONE NUMBER OF A PERSON OR PERSONS AUTHORIZED OUTSIDE THE NORMAL CONTRACT WORKING HOURS TO SECURE AND USE LABOR, MATERIALS, AND EQUIPMENT FOR EMERGENCY REPAIRS TO MAKE SAFE THE ENTIRE AREA OF THE CONTRACT. DUPLICATE COPIES OF SUCH NOTICES SHALL BE FILED WITH THE EIC, TRAFFIC SIGNAL MAINTENANCE, AND THE CITY OF PLATTSBURGH.

AUDIBLE WIRING

- THE MANUFACTURER'S SUGGESTED CABLES (OR EQUIVALENTS) SHALL BE USED WITH AUDIBLE PEDESTRIAN SIGNAL (APS) UNITS. THE QUANTITY OF CABLE REQUIRED AT THIS LOCATION SHALL BE DETERMINED BY THE CONTRACTOR IN ACCORDANCE WITH THE APS MANUFACTURER'S INSTALLATION DETAILS AND PROCEDURES.
- 2. REFER TO THE MANUFACTURER'S INSTALLATION AND PROCEDURE MANUALS FOR DETAILS.
- THE COST TO FURNISH AND INSTALL ALL WIRING BETWEEN THE AUDIBLE PEDESTRIAN SIGNAL (APS)
 UNITS FOR ITEM 680.81330010 AND THEIR RESPECTIVE CONTROL UNITS MOUNTED IN THE PED.
 HEADS SHALL BE INCLUDED UNDER PROVISIONS OF ITEM 680.81330010.

<u> APS</u>

- CONTRACTOR SHALL ORDER APS BUTTONS FROM MANUFACTURER WITH STREET NAME MESSAGES PRE-INSTALLED. CONTRACTOR SHALL PROVIDE COPIES OF THE ASSOCIATED ELECTRONIC WAVE FILES TO THE CITY OF PLATTSBURGH.
- APS PUSH BUTTONS SHALL BE POLARA ENGINEERING BDL3 BULLDOG III SERIES VANDAL RESISTANT ADA PUSH BUTTON.

CONTROLLER

- CITY OF PLATTSBURGH TO PROGRAM THE CONTROLLERS, EXCEPT AT OAK/BRINKERHOFF. CONTRACTOR SHALL COORDINATE INSTALLATION WITH THE CITY.
- * 2. SUPPLIER SHALL PROVIDE INITIAL PROGRAMMING AND PROVIDE EIGHT (8) HOURS OF TRAINING FOR PMLD PERSONNEL. COST TO BE INCLUDED IN PRICE BID FOR ITEM 680.80149305.
- * 3. CABINET AND CONTROLLER AT OAK & BRINKERHOFF SHALL BE NORTHEAST SIGNAL KA8P6-39DOE POLE MOUNTED CABINET WITH PEEK 3000E NEMA TS2 TYPE 2 CONTROLLER WITH DOUBLE DIAMOND CONFLICT MONITOR.
- * 4. UPON REMOVAL OF EXISTING CABINET, CONTROLLER, AND METER AT OAK AND BRINKERHOFF, CONTRACTOR SHALL RETURN OLD EQUIPMENT TO THE CITY OF PLATTSBURGH.

SALVAGE ITEMS

 EXISTING PEDESTRIAN POLES, CONTROLLERS, CABINETS, PUSH BUTTONS, AND SIGN PANELS REMOVED BY CONTRACTOR SHALL BE RETAINED BY THE CITY, FOR PICKUP BY THE CITY OF PLATTSBURGH DPW.

VEHICLE DETECTION

- * 1. CITY OF PLATTSBURGH PMLD SHALL PROVIDE AND INSTALL MICROWAVE DETECTION AT OAK/BRINKERHOFF. CONTRACTOR TO COORDINATE INSTALLATION WITH THE CITY.
 - * ADD ALTERNATE #3



C&S Engineers, Inc. 21 Arkansas Street Plattsburgh, New York 12903 Phone: 315-455-2000 Fax: 315-455-9667

Plattsburgh

OCAL PEDESTRIAN SAFET
ACTION PLAN
CITY OF PLATTSBURGH
CLINTON COUNTY, NEW YORK

MARK DATE DESCRIPTION

 REVISIONS

 PROJECT NO:
 A54,001,001

 DATE:
 OCTOBER 2021

 DRAWN BY:
 MING

 DESIGNED BY:
 KAN

NO ALTERATION PERMITTED HEREON EXCEPT AS PROVIDED UNDER SECTION 7209 SUBDIVISION 2 OF THE NEW YORK EDUCATION LAW

TRAFFIC SIGNAL NOTES

TSN-1SHEET 15 OF 20


Copyright ©





POLE, MAST ARM, OR SPAN WIRE MOUNTED YIELD SIGN

NOT TO SCALE

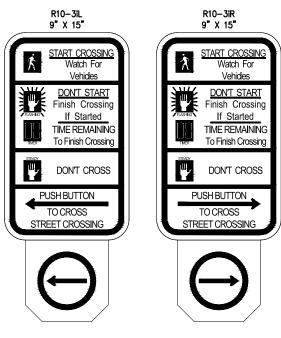



APS PUSH BUTTON AND SIGN NOT TO SCALE

HAND/MAN MODULE AND COUNT-DOWN TIMER

NOT TO SCALE


PEDESTRIAN -SIGNAL SIDEWALK ARROW ON SIGN SHALL POINT TOWARD CROSSWALK CONTROLLED BY APS (TYP)

PEDESTRIAN SIGNAL HEAD MOUNTING DETAIL


NOTE:

1. POST TOP MOUNT PEDESTRIAN SIGNAL HEADS IN THIS CONTRACT (BI-DIRECTIONAL) SHALL BE INSTALLED WITH A REINFORCING PLATE AND TUBING AS SHOWN IN THE DETAIL.

NOT TO SCALE

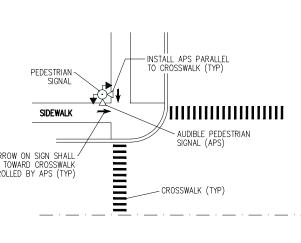

AUDIBLE PEDESTRIAN SIGNAL (APS) INSTALLATION SCHEMATIC NOT TO SCALE

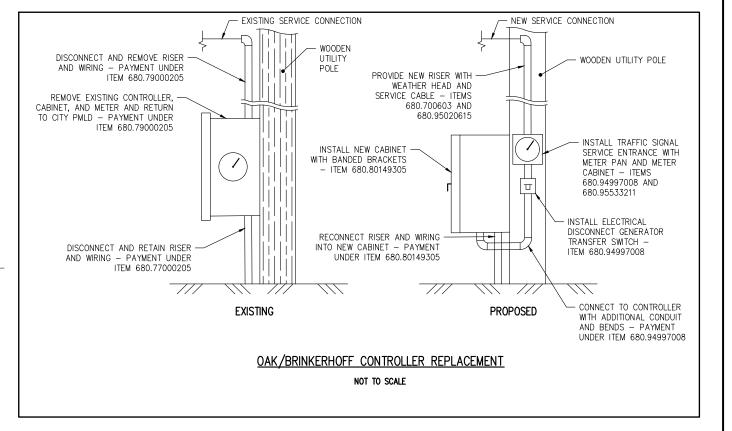

ADD ALTERNATE #3

C&S Engineers, Inc.

21 Arkansas Street Plattsburgh, New York 12903 Phone: 315-455-2000 Fax: 315-455-9667

DISCOVER | DÉCOUVREZ Plattsburgh NEW YORK

LOCAL PEDESTRIAN SAFETY CITY OF PLATTSBURGH CLINTON COUNTY, NEW YORK **ACTION PLAN**

MARK DATE DESCRIPTION REVISIONS PROJECT NO: A54.001.001

OCTOBER 2021 DRAWN BY: MNG DESIGNED BY: KAN

CHECKED BY: TEH NO ALTERATION PERMITTED HEREON EXCEPT AS PROVIDED UNDER SECTION 7209 SUBDIVISION 2 OF THE NEW YORK EDUCATION LAW

TRAFFIC SIGNAL **DETAILS**

TSN-2

SHEET 16 OF 20 Copyright ©

		BASE BID		ADD ALTERNATE #1	ADD ALTERNATE #2	ADD ALTERNATE #3		
	ITEM NUMBER	DESCRIPTION	UNIT	CORNELIA ST AT BROAD ST	CORNELIA ST AT PROSPECT AVE	CORNELIA ST AT BEEKMAN ST	CORNELIA ST AT N CATHERINE ST	OAK ST AT BRINKERHOFF ST
1	206.03	CONDUIT EXCAVATION AND BACKFILL INCLUDING SURFACE RESTORATION	LF	45	50	35	35	60
2	619.1613	MAINTAIN TRAFFIC SIGNAL EQUIPMENT (REQUIREMENT C)	INTM	1	1	1	1	1
3	635.0103	CLEANING AND PREPARATION OF PAVEMENT SURFACES - LINES	LF	760	1225	2180	890	2680
4	645.85	POLE MOUNTED SIGN SUPPORT SYSTEM (BAND MOUNTED)	EA		1	1		
5	647.31	RELOCATE SIGN PANEL, SIGN PANEL ASSEMBLY SIZE I (UNDER 30 SQUARE FEET)	EA		1		1	
5A	645.5102	GROUND-MOUNTED SIGN PANELS LESS THAN OR EQUAL TO 30 SQUARE FEET, WITH Z BARS	SF	20				
6	680.5001	POLE EXCAVATION AND CONCRETE FOUNDATION	CY	2.0	1.6	1.6	1.6	1.2
7	680.510501	PULLBOX - RECTANGULAR, 26" X 18", REINFORCED CONCRETE	EA	1	3		5	5
8	680.520106	CONDUIT, METAL STEEL, ZINC COATED, 2 NPS	LF	45	50	35	35	60
9	680.520108	CONDUIT, METAL STEEL, ZINC COATED, 3 NPS	LF	175	310	120	320	330
10	680.53	CONDUIT JACKING OR BORING	LF	175	310	120	320	330
11	680.6708	TRAFFIC SIGNAL POLE POST TOP MOUNT, 8 FEET MOUNTING HEIGHT	EA	5	4	4	4	3
1A	680.700603	RISER ASSEMBLY, 1" DIAMETER	EA					1
12	680.730714	SIGNAL CABLE 7 CONDUCTORS, 14 AWG	LF	1000	1140	900	880	1000
13	680.77000105	MODIFY TRAFFIC SIGNAL INSTALLATION, LOCATION 1	ELOC	1				
14	680.77000205	MODIFY TRAFFIC SIGNAL INSTALLATION, LOCATION 2	ELOC					1
15	680.78010005	ALTER PULLBOX FOR CONDUITS	EA	4	1	4		
16	680.79000105	REMOVE TRAFFIC SIGNAL INSTALLATION, LOCATION 1	ELOC	1				
6A	680.79000205	REMOVE TRAFFIC SIGNAL INSTALLATION, LOCATION 2	ELOC					1
17	680.80149305	NEMA TS 2 SOLID STATE MENU DRIVEN ACTUATED TRAFFIC SIGNAL CONTROLLER AND CABINET	EA					1
18	680.813105	PEDESTRIAN SIGNAL MODULE - 12 INCH, BI-MODAL HAND/MAN SYMBOLS, LED	EA	5	8	8	8	8
19	680.813103	PEDESTRIAN SIGNAL SECTION - TYPE 1, 12 INCH	EA	10	16	16	16	16
20	680.81330010	ACCESSIBLE PEDESTRIAN SIGNAL (APS) WITHOUT POLE	EA	8	8	8	8	8
21	680.8141	PEDESTRIAN SIGNAL BRACKET MOUNT ASSEMBLY	EA					1
22	680.8142	PEDESTRIAN SIGNAL POST TOP MOUNT ASSEMBLY	EA	5	4	4	4	3
23		PEDESTRIAN COUNTDOWN TIMER MODULE	EA	5	8	8	8	8
24	680.8204	OVERHEAD SIGN ASSEMBLY, TYPE D	EA	3	1	1	1	3
25		OVERHEAD SIGN ASSEMBLY, TYPE G	EA	1				
26	680.94000008	TRAFFIC SIGNAL SERVICE ENTRANCE	EA					1
27	680.94997008	FURNISH AND INSTALL ELECTRICAL DISCONNECT GENERATOR TRANSFER SWITCH	EA					1
28	680.95020615	SERVICE CABLE, 2 CONDUCTOR NO. 06 AWG	LF					30
29		METER CABINET	EA					1





CITY OF PLATTSBURGH CLINTON COUNTY, NEW YORK

LOCAL PEDESTRIAN SAFETY ACTION PLAN


MARK	DATE	DESCRIPTION	
		REVISIONS	

	REVISIONS
PROJECT NO:	A54.001.001
DATE:	OCTOBER 2021
DRAWN BY:	MNG
DESIGNED BY:	KAN

NO ALTERATION PERMITTED HEREON EXCEPT AS PROVIDED UNDER SECTION 7209 SUBDIVISION 2 OF THE NEW YORK EDUCATION LAW

TRAFFIC SIGNAL QUANTITIES

TSN-3SHEET 17 OF 20

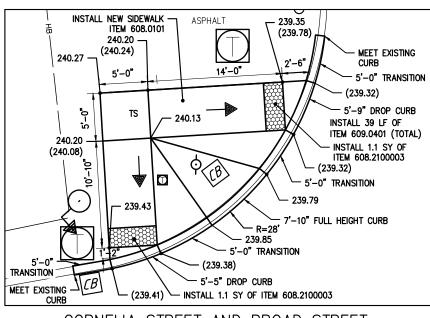

ASPHALT GRASS 239.05 INSTALL NEW SIDEWALK REMOVE CONCRETE INSTALL 1.1 SY OF ITEM 608.0101 SIDEWALK ITEM 608.2100003 - 239.26 MEET EXISTING R=30' -5'-0" 239,19 TRANSITION ASPHALT 238.97 6'-10" DROP CURB 238.88 $|\mathcal{L}\mathcal{B}|$ 5'-0" TRANSITION MEET EXISTING INSTALL 17 LF OF ITEM 609.0401 238.90 (TOTAL) REMOVE SIGN POST

CORNELIA STREET AND BROAD STREET NORTHEAST QUADRANT

INSTALL NEW 1' X 5' LANDING FOR PUSH BUTTON ACCESS BROAD (239.73)(239.72) (239.60)(239.62)GRASS WALGREENS Ø INSTALL 1.1 SY OF ITEM 608.2100003 GRASS

CORNELIA STREET AND BROAD STREET SOUTHEAST QUADRANT

CORNELIA STREET AND BROAD STREET NORTHWEST QUADRANT

38'-0" FULL HEIGHT CURB

8'-10" DROP CURB -

INSTALL 1.4 SY OF

ITEM 608.2100003

TC: 240.31 +

BC: 239.79

TC: 240.19

BC: 239.69 R=2'

TC: 240 16 =

BC: 239.66

BC: 239.81

INSTALL NEW SIDEWALK

TC: 240.34 BQ: 259.84

TC: 240.20 ·

BC: 239.70

BC: 239.81

- TC: 240.17 BC: 239.67

TC: 240.14

6'-0"

-TC: 240.31 .

TC; 240.30 BC: 239.80


—¹1т**è**м 608.020102

TC: 240.22

BC: 239.72 -

TC: 240.13

BC: 239.63

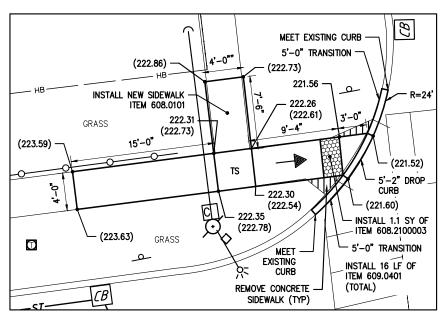

CB RELOCATE SIGN ITEM 645.81 GRASS ITEM 647.31 219.03 🖺 INSTALL NEW SIDEWALK ----- HB . ITEM 608.0101 (219.46)- (219.07) 8'-10" MEET **FXISTING** CURR R=18' 2'-6" FULL 7'-0" HEIGHT CURB (218.67) INSTALL 17 LF OF ITEM - 218.96 GRASS 609.0401 (TOTAL) (219.10) INSTALL 1.1 SY OF - 5'-1" TRANSITION ITEM 608.2100003 (218.98)4'-2" DROP CURB (218.69)5'-0" TRANSITION MEET EXISTING CURB

CORNELIA STREET AND BROAD STREET RAISED ISLAND

CORNELIA STREET AND PROSPECT AVENUE NORTHWEST QUADRANT

CORNELIA STREET AND PROSPECT AVENUE NORTHEAST QUADRANT

2021 t\A54

THE DETAILS AND DIMENSIONS PROVIDED ARE APPROXIMATE TO ACHIEVE ADA COMPLIANT RAMPS. THE CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND GRADES TO ENSURE COMPLIANCE WITH ADA REQUIREMENTS AND NYSDOT STANDARD SHEET 608-01 (SHEETS 1-12)

INSTALL 1.4 SY OF

8'-10" DROP CURB

ITEM 608.2100003

- 2. IF LAYOUTS REQUIRE ADJUSTMENT DUE TO FIELD CONDITIONS, NOTIFY ENGINEER IMMEDIATELY.
- 3. SIDEWALK REMOVALS SHALL END AT AN EXISTING JOINT.

ASPHALT

65'-0" FULL HEIGHT

TC: 240.34

BC: 239.84

SLOPED CURB

TC: 240.25

BC: 239.75


ITEM 608.020102 ·

INSTALL 121 LF OF

- ITEM 609.0403 (TOTAL)

- 4. REFER TO NYSDOT STANDARD SHEET 608-01 (SHEETS 1-12) FOR ADDITIONAL CURB RAMP NOTES AND DETAILS.
- ARROWS ON RAMPS REPRESENT DOWN GRADE DIRECTION. THE RUNNING SLOPE OF A CURB RAMP SHALL BE 7.5% MAXIMUM. SEE NOTES ON STANDARD SHEET 608-01 (SHEET 1 OF 12).
- REFER TO DWG NO. MSD-01 FOR SIDEWALK INSTALLATION SECTION.
- SYMBOLS (SIGNAL POLES, PULLBOXES, MANHOLES, VALVES, MONUMENTS, DRAINAGE STRUCTURES, ETC.) MAY BE EXAGGERATED FOR CLARITY.





PROPOSED ELEVATION XXX.XX (XXX.XX)

RAMP GRADE

TURNING SPACE. SLOPE NOT TO EXISTING ELEVATION



C&S Engineers, Inc. 21 Arkansas Street Plattsburgh, New York 12903 Phone: 315-455-2000 Fax: 315-455-9667



PEDESTRIAN SAFETY OF PLATTSBURGH I COUNTY, NEW YO PLAN CTION CITY O LOCAL 딩


MARK DATE DESCRIPTION REVISIONS PROJECT NO: A54,001,001 OCTOBER 202 DRAWN BY: MNG DESIGNED BY: KAN CHECKED BY: TEH

NO ALTERATION PERMITTED HEREON EXCEPT AS PROVIDED UNDER SECTION 7209 SUBDIVISION 2 OF THE NEW YORK EDUCATION LAW


> **CURB RAMP DETAILS**

CRD-1 SHEET 18 OF 20


SOUTHEAST QUADRANT

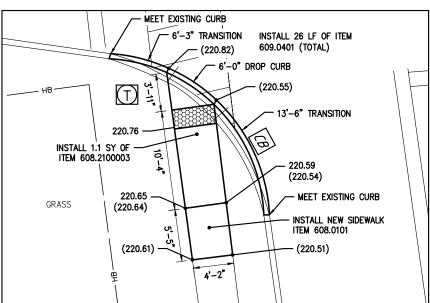


CORNELIA STREET AND PROSPECT AVENUE SOUTHWEST QUADRANT

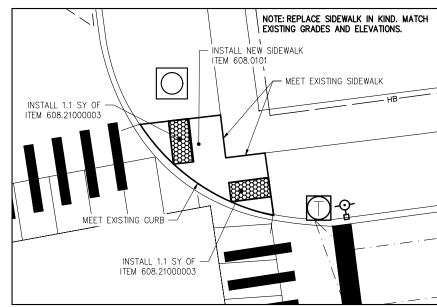

CORNELIA STREET AND BEEKMAN STREET NORTHEAST QUADRANT (ADD ALTERNATE #1)

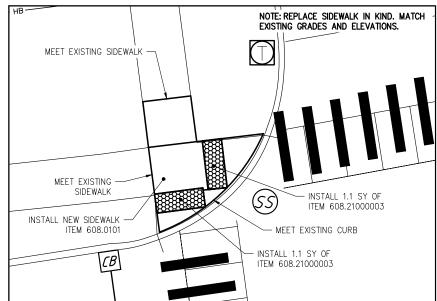

CORNELIA STREET AND BEEKMAN STREET NORTHWEST QUADRANT (ADD ALTERNATE #1)

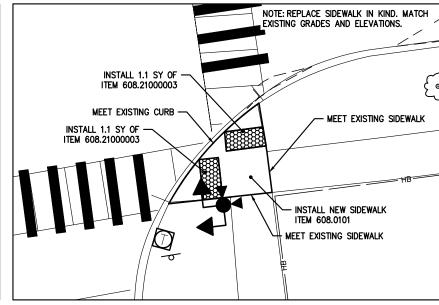


CORNELIA STREET AND BEEKMAN STREET SOUTHEAST QUADRANT (ADD ALTERNATE #1)

- THE DETAILS AND DIMENSIONS PROVIDED ARE APPROXIMATE TO ACHIEVE ADA COMPLIANT RAMPS. THE CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND GRADES TO ENSURE COMPLIANCE WITH ADA REQUIREMENTS AND NYSDOT STANDARD SHEET 608-01 (SHEETS 1-12)
- 2. IF LAYOUTS REQUIRE ADJUSTMENT DUE TO FIELD CONDITIONS, NOTIFY ENGINEER IMMEDIATELY.
- 3. SIDEWALK REMOVALS SHALL END AT AN EXISTING JOINT.
- 4. REFER TO NYSDOT STANDARD SHEET 608-01 (SHEETS 1-12) FOR ADDITIONAL CURB RAMP NOTES AND DETAILS.
- 5. ARROWS ON RAMPS REPRESENT DOWN GRADE DIRECTION. THE RUNNING SLOPE OF A CURB RAMP SHALL BE 7.5% MAXIMUM. SEE NOTES ON STANDARD SHEET 608-01 (SHEET 1 OF 12).
- REFER TO DWG NO. MSD-01 FOR SIDEWALK INSTALLATION SECTION.
- 7. SYMBOLS (SIGNAL POLES, PULLBOXES, MANHOLES, VALVES, MONUMENTS, DRAINAGE STRUCTURES, ETC.) MAY BE EXAGGERATED FOR CLARITY.

LEGEND:






TURNING SPACE. SLOPE NOT TO TS EXCEED 1.5% IN ANY DIRECTION.

PROPOSED ELEVATION XXX.XX (XXX.XX) EXISTING ELEVATION

RAMP GRADE



C&S Engineers, Inc. 21 Arkansas Street Plattsburgh, New York 12903 Phone: 315-455-2000 Fax: 315-455-9667

DISCOVER | DÉCOUVREZ Plattsburgh NEW YORK

PEDESTRIAN SAFETY OF PLATTSBURGH I COUNTY, NEW YO **ACTION PLAN** CITY O LOCAL


MARK DATE DESCRIPTION REVISIONS PROJECT NO: A54,001,001 OCTOBER 2021 DRAWN BY: MNG DESIGNED BY: KAN CHECKED BY: TEH NO ALTERATION PERMITTED HEREON

EXCEPT AS PROVIDED UNDER SECTION 7209 SUBDIVISION 2 OF THE NEW YORK EDUCATION LAW


CURB RAMP DETAILS

CRD-2 SHEET 19 OF 20


SOUTHEAST QUADRANT (ADD ALTERNATE #3)

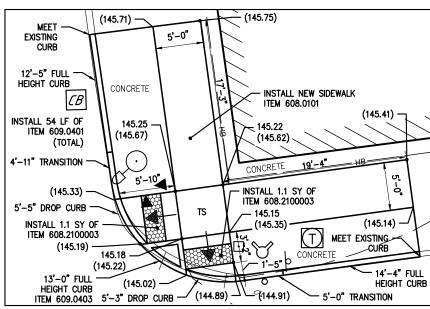


OAK STREET AND BRINKERHOFF STREET NORTHEAST QUADRANT (ADD ALTERNATE #3)

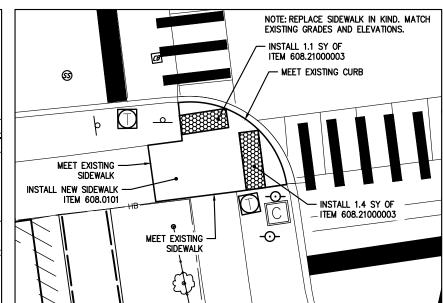

OAK STREET AND BRINKERHOFF STREET SOUTHWEST QUADRANT (ADD ALTERNATE #3)

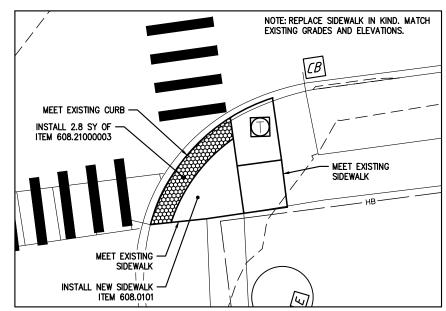

CORNELIA STREET AND NORTH CATHERINE STREET SOUTHEAST QUADRANT (ADD ALTERNATE #2)

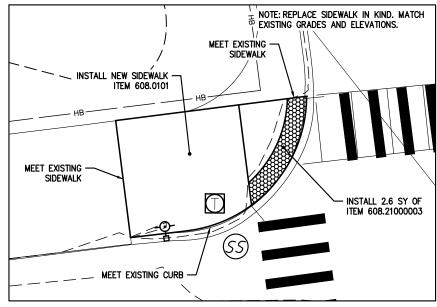


CORNELIA STREET AND NORTH CATHERINE STREET NORTHWEST QUADRANT (ADD ALTERNATE #2)

- THE DETAILS AND DIMENSIONS PROVIDED ARE APPROXIMATE TO ACHIEVE ADA COMPLIANT RAMPS. THE CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND GRADES TO ENSURE COMPLIANCE WITH ADA REQUIREMENTS AND NYSDOT STANDARD SHEET 608-01 (SHEETS 1-12)
- 2. IF LAYOUTS REQUIRE ADJUSTMENT DUE TO FIELD CONDITIONS, NOTIFY ENGINEER IMMEDIATELY.
- 3. SIDEWALK REMOVALS SHALL END AT AN EXISTING JOINT.
- 4. REFER TO NYSDOT STANDARD SHEET 608-01 (SHEETS 1-12) FOR ADDITIONAL CURB RAMP NOTES AND DETAILS.
- 5. ARROWS ON RAMPS REPRESENT DOWN GRADE DIRECTION. THE RUNNING SLOPE OF A CURB RAMP SHALL BE 7.5% MAXIMUM. SEE NOTES ON STANDARD SHEET 608-01 (SHEET 1 OF 12).
- REFER TO DWG NO. MSD-01 FOR SIDEWALK INSTALLATION SECTION.
- SYMBOLS (SIGNAL POLES, PULLBOXES, MANHOLES, VALVES, MONUMENTS, DRAINAGE STRUCTURES, ETC.) MAY BE EXAGGERATED FOR CLARITY.

LEGEND:







PROPOSED ELEVATION XXX.XX

(XXX.XX)

EXISTING ELEVATION RAMP GRADE



C&S Engineers, Inc. 21 Arkansas Street Plattsburgh, New York 12903 Phone: 315-455-2000 Fax: 315-455-9667



PEDESTRIAN SAFETY OF PLATTSBURGH I COUNTY, NEW YO **ACTION PLAN** CITY O LOCAL

MARK DATE DESCRIPTION REVISIONS PROJECT NO: A54,001,001 OCTOBER 202 DRAWN BY: MNG DESIGNED BY: KAN CHECKED BY: TEH

NO ALTERATION PERMITTED HEREON EXCEPT AS PROVIDED UNDER SECTION 7209 SUBDIVISION 2 OF THE NEW YORK EDUCATION LAW

> **CURB RAMP DETAILS**

CRD-3 SHEET 20 OF 20